

EST.2005

PANDAVIEW
EST.2005

PANDAVIEW



website



wechat



tiktok(china)

PANDAVIEW PLASTIC (QINGDAO) CO.,LTD.
PANDAVIEW LAWN & GARDEN (QD)LTD.

Address: No. 18 shuang yuan road, chengyang District, Qingdao city, Shandong Province, P.R. China PC.: 266000

Tel: 0086 532 6895 2272

Mobile Phone: +86 138 0895 5723

Fax:0086 532 6895 2272(direct line)

E-mail: sales01@pandaview.com

QQ: 595688960

wechat: +86 18554866545

whatsApp: +86 13808955723

www.pandaview.com

PVC HOSES

PVC塑料软管

MANGUERAS PVC

مىطارخ PVC

MANGUEIRAS DE PVC

ШЛАНГИ ПВХ

TUYAUX PVC

PVC-SCHLÄUCHE

PANDAVIEW

EST.2005



■ About Us

PandaView Plastic (Qingdao) Group Co., Ltd. was set up in December of 2005,after many years development, now she is top professional manufacturer of PVC HOSES.

The main products categories what we are producing include: PVC hoses include Steel wire hose, braided reinforced hoses, transparent clear hose, garden hoses, air hoses, suction hoses, discharged hoses base on Food grade and industry grade. PU and SILICON material hoses. Meanwhile we developed new products rubber sheets products in 2019, mainly kinds include rubber stud sheet, CR sheet, SBR sheet, NBR sheet, EPDM sheet, silicon rubber sheet, EPDM foam sheet, NBR solid cord, PVC transparent sheet and PU solid sheet. It mainly face to Europe Market service.

PandaView operates two responsible factories. one is professional PVC hoses manufacturer(PandaView owned), another a neighbor province joint venture factories mainly manufacture rubber products, at same time PandaView invested millions USD for one plastic furniture factory in 2011 but we never attend operation.

Now our PVC hoses factory have total 65 producing lines and over 300 full time workers. In 2021 we produced over 15,000 tons kinds of hoses.

To insure the client's confidence in our products, we offer three to ten years limited quality warranty on most of our products.

CONTENTS

PVC STEEL WIRE HOSES.....	02
PVC BRAIDED REINFORCED HOSES.....	04
PVC TRANSPARENT HOSES.....	06
PVC AIR HOSES.....	08
DISCHARGED/LAYFLAT HOSES.....	14
PVC SUCTION HOSES.....	20
PVC GARDEN HOSES.....	26
PU TRANSPARENT HOSES.....	37
PU AIR HOSES.....	40
PU DUCT HOSES.....	42
PU SUCTION HOSES.....	43
SILICON TRANSPARENT HOSES.....	44
RUBBER FOOD HOSES.....	47
EPDM FORAM &NBR CORD.....	49
SHEET PRODUCTS DIVISION.....	50
PVC HOSE PRODUCING MACHINE DIVISION.....	53


PANDAVIEW

EST.2005

PVC STEEL WIRE HOSE FOOD GRADE



Material: PVC
Usage: For conveyance of liquid & powder Foods and beverages
Features: Very soft hose with high transparency, small bending radius, inner&outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -5°C to 65C.
Usage icon:

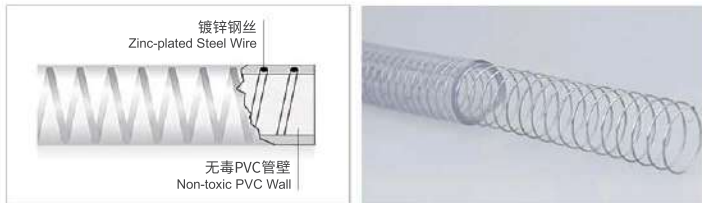

材质: PVC
用途: 各类液体和粉末状食品, 酒水饮料
产品特点: 高透明, 柔软钢丝增强管, 不变色, 无味, 无毒, 不含邻苯。-5至65摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 食用油, 粉末状食品等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.	O.D		At 23C	At 60C		
1/4	6	11	0.100	-1~11	33	16	10.0	100
5/16	8	13	0.127	-1~11	33	16	12.7	100
3/8	9	15	0.174	-1~11	33	16	17.4	100
1/2	12	18	0.218	-1~10	30	15	21.8	100
5/8	15	22	0.313	-1~10	30	15	31.3	100
3/4	19	25	0.319	-1~10	30	15	31.9	100
1	25	32	0.482	-1~7	23	13	24.1	50
1	25	33	0.561	-1~7	23	13	28.0	50
1-1/4	32	40	0.696	-1~7	23	13	34.8	50
1-1/2	38	48	1.040	-1~6	20	13	52.0	50
1-3/4	45	56	1.313	-1~6	20	10	52.5	40
2	50	61	1.476	-1~5	15	9	73.8	50
2	50	62	1.625	-1~5	15	9	81.2	50
2-3/8	60	74	2.268	-1~5	15	9	113.4	50
2-1/2	63	80	2.939	-1~5	15	9	146.9	50
3	75	90	2.992	-1~4	13	8	119.7	40
3	75	92	3.432	-1~4	13	8	137.3	40
3-1/2	90	108	4.309	-1~4	13	8	172.3	40
4	100	116	4.178	-1~3	10	6	125.3	30
4	100	118	4.744	-1~3	10	6	142.3	30
5	127	143	5.222	-1~3	10	6	156.7	30
6	152	168	6.190	-1~3	10	6	123.8	20
8	200	220	10.155	-1~3	10	6	203.1	20


PANDAVIEW

EST.2005

PVC STEEL WIRE HOSE INDUSTRY GRADE



Material: PVC
Usage: water, oil, Liquid and powder of industry engineering and sanitation lines
Features: Very soft hose with high transparency, small bending radius, inner&outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65C.
Usage icon:

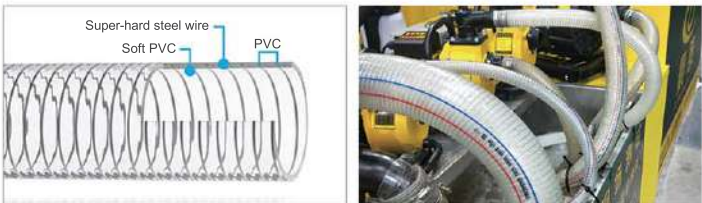

材质: PVC
用途: 水, 各类工业液体和粉末
产品特点: 高透明, 柔软钢丝增强管, 不变色, 无味, 无毒。-5至65摄氏度内应用。
应用范围: 水, 汽油, 泥沙, 粉末, 泥沙, 化工, 空气等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.	O.D		At 23C	At 60C		
1/4	6	11	0.100	-1~11	33	16	10.0	100
5/16	8	13	0.127	-1~11	33	16	12.7	100
3/8	9	15	0.174	-1~11	33	16	17.4	100
1/2	12	18	0.218	-1~10	30	15	21.8	100
5/8	15	22	0.313	-1~10	30	15	31.3	100
3/4	19	25	0.319	-1~10	30	15	31.9	100
1	25	32	0.482	-1~7	23	13	24.1	50
1	25	33	0.561	-1~7	23	13	28.0	50
1-1/4	32	40	0.696	-1~7	23	13	34.8	50
1-1/2	38	48	1.040	-1~6	20	13	52.0	50
1-3/4	45	56	1.313	-1~6	20	10	52.5	40
2	50	61	1.476	-1~5	15	9	73.8	50
2	50	62	1.625	-1~5	15	9	81.2	50
2-3/8	60	74	2.268	-1~5	15	9	113.4	50
2-1/2	63	80	2.939	-1~5	15	9	146.9	50
3	75	90	2.992	-1~4	13	8	119.7	40
3	75	92	3.432	-1~4	13	8	137.3	40
3-1/2	90	108	4.309	-1~4	13	8	172.3	40
4	100	116	4.178	-1~3	10	6	125.3	30
4	100	118	4.744	-1~3	10	6	142.3	30
5	127	143	5.222	-1~3	10	6	156.7	30
6	152	168	6.190	-1~3	10	6	123.8	20
8	200	220	10.155	-1~3	10	6	203.1	20

PANDAVIEW

EST.2005

PVC BRAIDED HOSE FOOD GRADE



Material: PVC
Usage: For conveyance of liquid Foods and beverages
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -5°C to 65C.
Usage icon:



材质: PVC
用途: 各类液体食品和酒水饮料
产品特征: 高透明, 柔软纤维增强管, 不变色, 无味无毒, 不含邻苯。-5 至65摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 牛奶, 食用油, 空气等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
	I.D.	O.D					
Inch			Kgs	Bar	At 23C	Kgs	Meter
13/64"	5	9	0.059	9	27	5.9	100
1/4"	6	10	0.068	9	27	6.8	100
1/4"	6	12	0.114	11	33	11.4	100
5/16"	8	12	0.085	9	27	8.5	100
5/16"	8	14	0.140	11	33	14.0	100
3/8"	9	13	0.093	9	27	9.3	100
3/8"	9	14	0.122	9	27	12.2	100
13/32"	10	14	0.102	8	24	10.2	100
13/32"	10	16	0.165	9	27	16.5	100
1/2"	12	16	0.119	8	24	11.9	100
1/2"	12	18	0.191	9	27	19.1	100
1/2"	13	17	0.127	8	24	12.7	100
1/2"	13	19	0.203	9	27	20.3	100
35/64"	14	20	0.216	8	24	21.6	100
5/8"	15	20	0.185	8	24	18.5	100
5/8"	15	21	0.229	8	24	22.9	100
5/8"	16	21	0.196	8	24	19.6	100
5/8"	16	22	0.242	8	24	24.2	100
45/64"	18	24	0.267	6	18	26.7	100
3/4"	19	24	0.228	6	18	13.7	60
3/4"	19	26	0.334	6	18	20.0	60
25/32"	20	25	0.238	6	18	14.3	60
25/32"	20	26	0.292	6	18	17.5	60
25/32"	20	27	0.349	7	21	20.9	60
55/64"	22	30	0.441	7	21	26.5	60
	25	31	0.356	5	15	21.4	60
	25	32	0.423	5	15	25.4	60
1-1/4"	32	39	0.527	4	12	26.3	50
1-1/4"	32	41	0.696	5	15	34.8	50
1-1/2"	38	45	0.616	4	12	30.8	50
1-1/2"	38	46	0.712	4	12	35.6	50
1-1/2"	38	47	0.811	4	12	40.5	50
1-3/4"	45	55	1.060	4	12	53.0	50
2"	50	58	0.916	3	9	27.5	30
2"	50	60	1.166	3	9	35.0	30
2-33/64"	64	78	2.107	4	12	63.2	30
3"	75	90	2.623	4	12	78.7	30

PANDAVIEW

EST.2005

PVC BRAIDED HOSE INDUSTRY GRADE



Material: PVC
Usage: water, oil ,Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5C to 65C.
Usage icon:



材质: PVC
用途: 水, 油, 空气, 机械配件和各类液体
产品特征: 高透明, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 水, 汽油, 机器配件, 空气等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
	I.D.	O.D					
Inch			Kgs	Bar	At 23C	Kgs	Meter
13/64"	5	9	0.059	9	27	5.9	100
1/4"	6	10	0.068	9	27	6.8	100
1/4"	6	12	0.114	11	33	11.4	100
5/16"	8	12	0.085	9	27	8.5	100
5/16"	8	14	0.140	11	33	14.0	100
3/8"	9	13	0.093	9	27	9.3	100
3/8"	9	14	0.122	9	27	12.2	100
13/32"	10	14	0.102	8	24	10.2	100
13/32"	10	16	0.165	9	27	16.5	100
1/2"	12	16	0.119	8	24	11.9	100
1/2"	12	18	0.191	9	27	19.1	100
5/8"	15	20	0.185	8	24	18.5	100
5/8"	15	21	0.229	8	24	22.9	100
45/64"	18	24	0.267	6	18	26.7	100
3/4"	19	24	0.228	6	18	13.7	60
3/4"	19	26	0.334	6	18	20.0	60
25/32"	20	25	0.238	6	18	14.3	60
25/32"	20	26	0.292	6	18	17.5	60
	25	31	0.356	5	15	21.4	60
	25	32	0.423	5	15	25.4	60
1-1/4"	32	39	0.527	4	12	26.3	50
1-1/4"	32	41	0.696	5	15	34.8	50
1-1/2"	38	45	0.616	4	12	30.8	50
1-1/2"	38	46	0.712	4	12	35.6	50
1-3/4"	45	55	1.060	4	12	53.0	50
2"	50	58	0.916	3	9	27.5	30
2"	50	60	1.166	3	9	35.0	30
2-33/64"	64	78	2.107	4	12	63.2	30
3"	75	90	2.623	4	12	78.7	30

PANDAVIEW

EST.2005

PVC TRANSPARENT HOSE FOOD GRADE



Material: PVC
Usage: For conveyance of liquid Foods and beverages
Features: Very soft hose with high transparency, small bending radius without folding, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -5°C to 65C.
Usage icon:



材质: PVC
用途: 各类液体食品和酒水饮料
产品特点: 高透明, 柔软单体管, 不变色, 无味无毒, 不含邻苯。-5 至65摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 牛奶, 食用油, 空气等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
	Inch	I.D. O.D					
1/8	2	4	0.014	5	14	1.4	100
1/8	3	5	0.016	5	14	1.6	100
5/32"	4	6	0.020	5	14	2.0	100
3/16"	5	7	0.025	5	14	2.5	100
1/4	6	8	0.030	5	14	3.0	100
5/15	8	10	0.039	5	14	3.9	100
3/8	10	12	0.047	5	14	4.7	100
1/2	12	15	0.087	5	14	8.7	100
5/8	15	18	0.106	5	14	5.3	50
3/4	19	22	0.132	5	14	6.6	50
1	25	31	0.361	4	12	18.1	50
1-1/4	32	38	0.452	4	12	22.6	50
1-1/2	38	44	0.529	4	12	26.5	50
2	50	58	0.929	3	12	37.2	40

TIPS: EU 10/2011 is the only European general standard for plastic products to touch with food. The general idea of the test method is to simulate the actual application conditions of various foods, soak the tube with the simulated liquid, and test how many components migrate to the simulated liquid after a certain time and temperature to judge whether the tube is suitable for different foods.
EU 10/2011是欧洲唯一的塑料产品接触食品的标准。测试方法的总体思路是模拟各种食品实际应用条件, 用模拟液浸泡管子, 在经过一定的时间和温度后测试有多少成分迁移到模拟液里, 从而判断管子是否适合用于不同的食品。

PANDAVIEW

EST.2005

PVC TRANSPARENT HOSE INDUSTRY GRADE



Material: PVC
Usage: water, oil ,Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65C.
Usage icon:



材质: PVC
用途: 水, 油, 空气, 机械配件和各类液体
产品特点: 高透明, 柔软钢丝管增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 水, 汽油, 机器配件, 空气等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
	Inch	I.D. O.D					
1/8	2	4	0.014	5	14	1.4	100
1/8	3	5	0.016	5	14	1.6	100
5/32"	4	6	0.020	5	14	2.0	100
3/16"	5	7	0.025	5	14	2.5	100
1/4	6	8	0.030	5	14	3.0	100
5/15	8	10	0.039	5	14	3.9	100
3/8	10	12	0.047	5	14	4.7	100
1/2	12	15	0.087	5	14	8.7	100
5/8	15	18	0.106	5	14	5.3	50
3/4	19	22	0.132	5	14	6.6	50
1	25	31	0.361	4	12	18.1	50
1-1/4	32	38	0.452	4	12	22.6	50
1-1/2	38	44	0.529	4	12	26.5	50
2	50	58	0.929	3	12	37.2	40

TIPS: Industrial grade and food grade hoses are almost indistinguishable from the surface, the main difference being the material of the hose. Same as food grade hoses, industrial grade hoses are no any toxic. Food grade materials are mandatory in the food industry, while hoses for industrial use do not have such mandatory requirements.
备注: 工业级别与食品级别的管子从表面几乎没有区别, 主要区别在于管子的材料有所不同。工业级别的管子与食品级管子一样没有任何毒性。食品级材料是食品工业的强制要求, 而工业用途的管子则没有此类强制要求。

PANDAVIEW

EST.2005

PVC POPULAR AIR HOSE(3 LAYERS)



Material: PVC
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not change color. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 油, 空气, 机械配件和各类液体
产品特点: 不透明气管, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 机器配件, 空气, 工具, 工业油。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.			At 23C	At 60C		
13/64		5	11	0.102	25	75	50	10.0
1/4		6	12	0.114	25	75	50	12.7
5/16		8	13	0.111	25	75	50	17.4
3/8		9	15	0.153	20	60	40	21.8
13/32		10	16	0.165	20	60	40	31.3
1/2		12	18	0.191	20	60	40	31.9
3/4		19	25	0.280	15	45	30	24.1
1		25	32	0.423	15	45	30	28.0

PANDAVIEW

EST.2005

PVC AIR HOSE HIGH PRESSURE(5 LAYERS)



Material: PVC
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 油, 空气, 机械配件和各类液体
产品特点: 不透明气管, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 机器配件, 空气, 工具, 工业油。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.			At 23C	At 60C		
13/64		5	11	0.102	25	75	50	5.1
1/4		6	12	0.114	25	75	50	5.7
5/16		8	14	0.140	25	75	50	7.0
3/8		9	16	0.185	20	60	40	7.4
13/32		10	17	0.200	20	60	40	8.0
1/2		12	19	0.230	20	60	40	9.2
3/4		19	27	0.390	15	45	30	11.7
1		25	34	0.563	15	45	30	16.9

PANDAVIEW

EST.2005

PVC HIGH PRESSURE SPRAY HOSE



Material: PVC
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 油, 空气, 机械配件和各类液体
产品特点: 不透明喷雾管, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 喷洒农药, 输水, 机器配件, 空气, 工具配件。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.			At 23C	At 60C		
1/4		6.5	12.5	0.123	60	180	170	6.1
5/16		8.5	13.5	0.118	40	120	170	5.9
5/16		8.5	14.5	0.148	50	150	170	7.4
5/16		8.5	15.5	0.181	60	180	170	9.0
3/8		9.5	16.5	0.196	60	180	170	9.8
13/32		10	17	0.203	40	120	110	10.2
1/2		12	19	0.233	40	120	110	11.7
3/4		19	27	0.396	40	120	110	19.8
1		25	33	0.499	30	100	90	25.0

PANDAVIEW SUPPER PRESSURE AIR HOSE FULL BRAIDED



Material: PVC+RUBBER
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with PVC and RUBBER mixed material, small bending radius, inner & outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.

Usage icon:



材质: PVC+RUBBER
用途: 油, 空气, 机械配件和各类液体
产品特点: PVC与橡胶合成管, 不透明, 柔软, 纤维增强, 不变色, 无味无毒。-10 至65摄氏度内应用。
应用范围: 喷洒农药, 机器配件, 焊接, 煤气, 工具配件。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
1/4	6.5	12.5	0.119	60	180	170	6.0	50
5/16	8	14.5	0.153	60	180	170	7.6	50
3/8	10	16.5	0.180	40	120	110	9.0	50
1/2	13	20.5	0.262	40	120	110	13.1	50
5/8	16	24.5	0.359	40	120	110	18.0	50
3/4	19	29	0.501	40	120	110	25.1	50
1	25	36	0.701	30	100	90	35.0	50

PANDAVIEW PVC TWINS WELDING HOSE



Material: PVC
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner & outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.

Usage icon:



材质: PVC
用途: 油, 空气, 机械配件和各类液体
产品特点: 高透明, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 焊接, 机器配件, 空气, 工具。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
13/64	5	11	0.102	25	75	50	5.1*2	50
1/4	6	12	0.114	25	75	50	5.7*2	50
5/16	8	13	0.111	25	75	50	5.6*2	50
3/8	9	15	0.153	20	60	40	7.6*2	50
13/32	10	16	0.165	20	60	40	8.3*2	50
1/2	12	18	0.191	20	60	40	9.5*2	50

PANDAVIEW PVC GAS & LPG HOSE



Material: PVC
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner & outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.

Usage icon:



材质: PVC
用途: 油, 空气, 机械配件和各类液体
产品特点: 高透明, 柔软纤维增强管, 不变色, 无味无毒。-5 至65摄氏度内应用。
应用范围: 煤气, 机器配件, 空气, 工具。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
3/8	9	15	0.153	20	60	40	7.6	50
1/2	13	20	0.236	20	60	40	11.8	50


PANDAVIEW

EST.2005

PVC AIR HOSES STANLEY YELLOW



Material: PVC
Usage: oil ,Liquid, air and machine part of industry engineering and sanitation lines.
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not become hard. No smell and non-toxic. Application under Celsius -5C to 65C.
Usage icon:



材质: PVC
用途: 油，空气，机械配件和各类液体。
产品特点: 舒适手感，高压，柔软纤维增强管，不变色，无味无毒。-5 至65摄氏度内应用。
应用范围: 机器配件，空气，工具，汽油。

SPECIFICATION:

name	Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.	I.D.	Kgs	Bar	At 23C	At 60C	Kgs	Meter
AIR HOSE	1/4	6	12	0.114	25	75	50	5.7	50
	5/16	8	13	0.111	25	75	50	5.6	50
	3/8	9	15	0.153	20	60	40	7.6	50
	13/32	10	16	0.165	20	60	40	8.3	50
	1/2	12	18	0.191	20	60	40	9.5	50


PANDAVIEW

EST.2005

JACKHAMMER HOSE HIGH PRESSURE



Material: RUBBER+PVC
Usage: oil ,Liquid, air and machine part of industry engineering and sanitation lines.
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not become hard. No smell and non-toxic. Application under Celsius -5C to 65C.
Usage icon:



材质: PVC
用途: 油，空气，机械配件和各类液体。
产品特点: 舒适手感，高压，柔软纤维增强管，不变色，无味无毒。-5 至65摄氏度内应用。
应用范围: 机器配件，空气，工具，汽油。

SPECIFICATION:

name	Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	Inch	I.D.	I.D.	Kgs	Bar	At 23C	At 60C	Kgs	Meter
AIR HOSE	1/2	13	20	0.245	20	60	40	12.24	50
	5/8	16	24	0.339	20	60	40	16.96	50
	3/4	19	28	0.448	20	60	40	22.41	50
	1	25	35	0.636	20	60	40	31.79	50


PANDAVIEW

EST.2005

RUBBER TWINS WELDING HOSE



Material: RUBBER
Usage: oil ,Liquid, air and machine part of industry engineering and sanitation lines.
Features: Very soft hose with new material, small bending radius, inner &outer surface smoothly. High pressure. Will not become hard. No smell and non-toxic. Application under Celsius -5C to 65C.
Usage icon:



材质: 橡塑
用途: 油，空气，机械配件和各类液体。
产品特点: 舒适手感，高压，柔软纤维增强管，不变色，无味无毒。-5 至65摄氏度内应用。
应用范围: 焊接，机器配件，空气，工具。

SPECIFICATION:

name	Size	Metric Meas.(MM)		Weight/M	Weight/M	W.P.	B.P (Bar)	Weight/Roll	M/Roll
	Inch	I.D.	I.D.	Kgs	kgs		At 23C	Kgs	Meter
AIR HOSE	1/4	6	6	0.165	0.15	20	60	16.50	100
	5/16	8	8	0.22	0.2	20	60	22.00	100
	3/8	9	9	0.265	0.24	20	60	26.50	100
	13/32	10	10	0.27	0.25	20	60	27.00	100
	1/2	13	13	0.37	0.35	20	60	37.00	100
	5/8	16	16	0.5	0.46	20	60	25.00	50
	3/4	19	19	0.65	0.6	20	60	32.50	50
	7/8	22	22	0.75	0.7	20	60	37.50	50
	1	25	25	0.85	0.8	20	60	42.50	50


PANDAVIEW

EST.2005

PVC DISCHARGED HOSE POPULAR



Material: PVC
Usage: For Agriculture irrigation and Water discharged in building
Features: Popular discharged hose with W.P.4BAR/ B.P.12BAR above working pressure, inner & outer surface smoothly. Will not change color. No smell and non-toxic. REACH standard. Application under Celsius -5°C to 65°C.

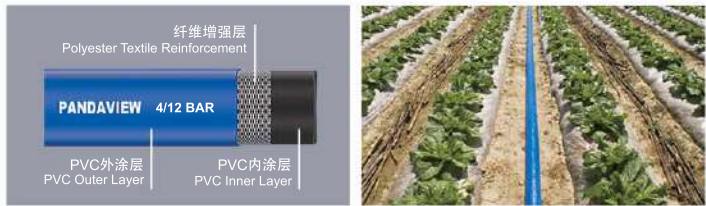

材质: PVC
用途: 农业灌溉，工业排水
产品特点: 全新料一步法水带，4公斤工作压力，12公斤爆破压力。不变色，无味无毒。-5至65摄氏度内应用。
应用范围: 水，农业灌溉，抽泥沙，洪涝排水。

SPECIFICATION:

Size	Meas.(MM)	Tolerance	Weight/M	W.P.	B.P(Bar)	Maxi. diameter swell at WP	Weight/Roll	M/Roll
Inch	O.D.	MM	Kgs	Bar		%	(KGS)	
1	25	-0/+1	0.15	8	24	6	15.0	100
1-1/4	32	-0/+1	0.17	8	24	6	17.0	100
1-1/2	38	-0/+1	0.20	6	18	6	20.0	100
2	50	-0/+1	0.23	4	12	6	23.0	100
2-1/2	64	-0/+1	0.32	4	12	6	32.0	100
3	75	-0/+1	0.40	4	12	6	40.0	100
3-1/2	90	-0/+1	0.55	4	12	6	55.0	100
4	102	-0/+1	0.58	4	12	6	58.0	100
5	127	-0/+1	0.80	4	12	6	40.0	50
6	152	-0/+1	1.20	4	12	6	60.0	50
8	203	-0/+2	1.60	3	9	6	80.0	50



PANDAVIEW

EST.2005

PVC DISCHARGED HOSE HEAVY DUTY



Material: PVC
Usage: For Agriculture irrigation, water Discharged and mine discharge water.
Features: Popular discharged hose with W.P.8BAR/ B.P.24BAR working pressure, inner & outer surface smoothly. Water drainage in emergency / flood / disaster situations . No smell and non-toxic. Application under Celsius -5°C to 65°C.

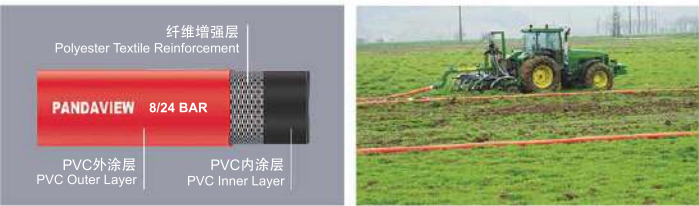

材质: PVC
用途: 农业灌溉，工业排水，矿山排水，洪涝救灾。
产品特点: 全新料一步法水带，不变色，无味无毒。-5至65摄氏度内应用。
应用范围: 水，农业灌溉，抽泥沙，洪涝排水。

SPECIFICATION:

Size	Meas.(MM)	Tolerance	Weight/M	W.P.	B.P(Bar)	Maxi. diameter swell at WP	Weight/Roll	M/Roll
Inch	O.D.	MM	Kgs	Bar		%	(KGS)	
1-1/4	32	-0/+1	0.17	8	24	6	17.0	100
1-1/2	38	-0/+1	0.22	8	24	6	22.0	100
2	50	-0/+1	0.35	8	24	6	35.0	100
2-1/2	64	-0/+1	0.48	8	24	6	48.0	100
3	75	-0/+1	0.66	8	24	6	66.0	100
3-1/2	90	-0/+1	0.85	8	24	6	85.0	100
4	102	-0/+1	1.02	8	24	6	102.0	100
5	127	-0/+1	1.35	8	24	6	67.5	50
6	152	-0/+1	1.90	8	24	6	95.0	50
8	203	-0/+2	2.30	7	21	6	115.0	50
10	257	-0/+2	2.30	4	12	10	92.0	40
12	308	-0/+2	2.91	4	12	10	116.4	40
14	359	-0/+2	3.65	4	10	10	146.0	40
16	410	-0/+2	4.28	3	10	10	171.2	40

PANDAVIEW

EST.2005

PVC LAYFLAT HOSE ECONOMIC



Material: PVC
Usage: For Agriculture irrigation and Water discharged in building with low pressure.
Features: Popular discharged hose with 2-3BAR above working pressure, inner & outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



water

irrigation

flood discharge

材质: PVC **用途:** 农业灌溉, 低压工业排水 **产品特点:** 全新料一步法水带, 不变色, 无味无毒. -5 至65摄氏度内应用。
应用范围: 水, 农业灌溉, 排水。

SPECIFICATION:

Size	Meas.(MM)	Tolerance	Weight/M	W.P.	B.P(Bar)	Maxi. diameter swell at WP	Weight/Roll	M/Roll
Inch	O.D.	MM	Kgs	Bar		%	(KGS)	
1	25	-0/+1	0.15	8	24	6	15.0	100
1-1/4	32	-0/+1	0.17	8	24	6	17.0	100
1-1/2	38	-0/+1	0.20	6	18	6	20.0	100
2	50	-0/+1	0.22	3	12	6	22.0	100
2-1/2	64	-0/+1	0.30	3	12	6	30.0	100
3	75	-0/+1	0.38	3	12	6	38.0	100
3-1/2	90	-0/+1	0.52	3	12	6	52.0	100
4	102	-0/+1	0.55	3	12	6	55.0	100
5	127	-0/+1	0.75	3	12	6	37.5	50
6	152	-0/+1	0.90	3	12	6	45.0	50

TIPS: REACH is the abbreviation of REGULATION concerning the Registration, evaluation, Authorization and Restriction of Chemicals. It is a chemical established by the European Union and implemented on June 1, 2007. Regulatory system. This is a regulatory proposal involving the safety of chemical production, trade, and use. The regulations are designed to protect human health and environmental safety, maintain and enhance the competitiveness of the EU chemical industry, and develop innovative capabilities for non-toxic and harmless compounds to prevent market fragmentation. Increase the transparency of chemical use, promote non-animal experiments, and pursue sustainable social development.

REACH是欧盟规章《化学品注册、评估、许可和限制》(REGULATION concerning the Registration, evaluation, Authorization and Restriction of Chemicals)的简称,是欧盟建立的, 并于2007年6月1日起实施的化学品监管体系。 这是一个涉及化学品生产、贸易、使用安全的法规提案, 法规旨在保护人类健康和环境安全, 保持和提高欧盟化学工业的竞争力, 以及研发无毒无害化合物的创新能力, 防止市场分裂, 增加化学品使用透明度, 促进非动物实验, 追求社会可持续发展等。

PANDAVIEW

EST.2005

PE LAYFLAT HOSE FOR IRRIGATION



Material: PE **Usage:** For Agriculture irrigation.
Features: Popular PE sprink Irrigation Water Hose Pipe with very light weight. It will not change color. No smell and non-toxic. Application under Celsius -5C to 65C.
Usage icon:



irrigation

材质: PE **用途:** 农业灌溉 **产品特点:** 全新料一步法PE喷射水带, 不变色, 无味无毒. -5至65摄氏度内应用。
应用范围: 农业喷雾灌溉。

SPECIFICATION:

Size	Meas.	Thickness	Hole distance	W.P.	Hole qty	Water flow	Spray distance	M/Roll
Inch	I.D.(mm)	MM	Kgs	Bar	M	M2/h/100m	M	M
1	25	0.16-0.25	10/15/20/30	2	3/5	10	2-3	100/200
1-1/4	32	0.16-0.25	10/15/20/30	2	3/5	16.5	2-3	100/200
1-1/2	40	0.16-0.4	10/15/20/30	2	3/5	14	3-4	100/200
2	50	0.16-0.4	10/15/20/30	2	3/5	14	3-4	100
2-1/2	63	0.16-0.4	10/15/20/30	1.5	3/5	14	6-8	100
3	75	0.16-0.4	10/15/20/30	1.5	3/5	10.8	6-8	100

PANDAVIEW

EST.2005

PU DISCHARGED HOSE FULL WEAVED



Material: TPU
Usage: For Flood fighting and rescue, Water Discharged, mine discharge water and Forest fire.
Features: Popular PU discharged hose with W.P.20BAR/B.P.60 BAR pressure, inner & outer surface smoothly. Water drainage in emergency/flood/disaster situations . Will not change color. No smell and non-toxic. Application under Celsius -50C to 85C.
Usage icon:

water

forest fire

silt

flood discharge

mine

材质: 聚氨酯 **用途:** 抗洪抢险, 工业排水, 矿山排水和森林消防。
产品特点: 全新料一步法聚氨酯水带不变色, 无味无毒。-50 至85摄氏度内应用。
应用范围: 排水, 森林消防, 抽泥沙, 抗洪抢险, 矿山。

SPECIFICATION:

Size	Meas.(MM)	Tolerance	Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	O.D.	MM	Kgs	Bar	Bar	(KGS)	Meter
2	50	-0/+1	0.5	21	60	50.0	100
2-1/2	64	-0/+1	0.65	21	60	65.0	100
3	75	-0/+1	0.75	20	60	75.0	100
3-1/2	90	-0/+1	1.0	20	60	100.0	100
4	102	-0/+1	1.16	15	45	116.0	100
5	127	-0/+1	1.9	15	45	95.0	50
6	152	-0/+1	2.33	15	45	116.5	50
8	203	-0/+2	3.43	12	35	171.5	50
10	257	-0/+2	4.59	12	35	183.6	40
12	308	-0/+2	5.01	10	30	200.4	40
14	359	-0/+2.5	6.5	10	30	260.0	40
16	410	-0/+2.5	8.2	10	30	328.0	40

PANDAVIEW

EST.2005

FRACTURING & OILFIELD HOSE



Material: Nitrile /TPR rubber
Usage: Water discharge, Transfers, Drainage, Irrigation installations, Pumping of sludge and liquid fertilizers, Chemical industry, Refineries, Air pressure Premium Solution
Features: a. Ultimate Tensile Strength: Tensile strength of the lining and cover shall not be less than 1500psi (10500kpa); b. Ultimate Elongation: 400% minimum; Accelerated Aging Test.
Tube and cover: Nitrile/TPR Blend, ribbed cover for maximum abrasion resistance. Thick wall.
Reinforcement: 100% virgin high tenacity polyester Jacket.
Temperature: -25°C to +100°C
The tensile strength and ultimate elongation of the vulcanized rubber compound which has been subjected to the action of oxygen at a pressure of 300psi +/-10psi, (2100kpa+/-70kpa) and temperature of 70 degrees centigrade +/- degree centigrade (158 F +/- 18F) for a period of 96 hours shall be greater than 60% of the original properties stated.
Usage icon:

water

forest fire

flood discharge

mine

oil drilling

材质: 丁晴橡胶 **用途:** 抗洪抢险, 工业排水, 矿山排水, 化工材料和森林消防。
产品特点: 全新料一步法橡胶水带, 不变色, 无味无毒。-25至100摄氏度内应用。
应用范围: 排水, 森林消防, 抽泥沙, 抗洪抢险, 矿山, 石油开采。

SPECIFICATION:

Size	Meas.(MM)	Tolerance	Weight/M	W.P.	B.P	Expansion at WP	Weight/Roll	M/Roll
Inch	O.D.	MM	Kgs	Bar	Bar	%	(KGS)	Meter
3	75	-0/+1	1.0	15	45	<=5	66.0	100
4	102	-0/+1	1.4	15	45	<=5	102.0	100
5	127	-0/+1	2.0	15	45	<=5	67.5	50
6	152	-0/+1	2.5	12	35	<=5	95.0	50
8	203	-0/+2	3.75	12	35	<=5	115.0	50
10	257	-0/+2	4.63	10	30	<=5	92.0	40
12	308	-0/+2	5.85	10	30	<=5	116.4	40
14	359	-0/+2	7.3	10	30	<=5	146.0	40
16	400	-0/+2	7.5	10	30	<=5	171.2	40

PANDAVIEW

EST.2005

PVC SUCTION HOSE FOOD GRADE



Material: PVC
Usage: For conveyance of liquid & powder Foods
Features: Soft hose with transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -5°C to 65°C.
Usage icon:

food

water

beverages

beer

powder

材质: PVC
用途: 各类液体和粉末状食品
产品特征: 高透明, 柔软塑筋增强管, 不变色, 无味无毒, 不含邻苯。-5 至65摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 牛奶, 食用油, 粉末, 空气。

SPECIFICATION:

I.D.	O.D.	LENGTH	OVALSPRING DIAMATER	WEIGHT/MT	W.P.	B.P(Bar)	WALL THICKNESS	RADIUS
MM	MM	MT	MM	KGS	Bar	At23C	MM	MM
20	25	50	3	0.26	-1~6	18	2.5	100
25	30	50	3	0.28	-1~6	18	2.5	100
30	35	50	3.3	0.33	-1~6	18	2.5	120
35	41	50	3.7	0.46	-1~6	18	3	140
40	46	50	4	0.52	-1~6	18	3	160
45	53	50	5	0.60	-1~6	18	4	180
50	58	50	5	0.80	-1~6	18	4	250
60	68	50	5	0.90	-1~6	18	4	300
70	78	50	5	1.15	-1~5	18	4	350
75	85	50	5.5	1.37	-1~5	15	5	375
80	90	50	5.5	1.68	-1~4	12	5	400
90	100	30	6	1.75	-1~4	12	5	450
100	111	30	6	2.00	-1~4	12	5.5	500
125	139	30	8	3.14	-1~4	12	7	700

PANDAVIEW

EST.2005

PVC SUCTION HOSE INDUSTRY GRADE I



Material: PVC
Usage: For conveyance of liquid & powder of industry
Features: Soft hose with transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:

water

flood discharge

silt

powder

oil

材质: PVC
用途: 各类液体和粉末状食品
产品特征: 高透明, 柔软塑筋增强管, 不变色, 无味无毒, -5 至65摄氏度内应用。
应用范围: 通水, 抗洪排水, 泥沙, 粉末, 汽油。


SPECIFICATION:

I.D.	O.D.	LENGTH	OVALSPRING DIAMATER	WEIGHT/MT	W.P.	B.P(Bar)	WALL THICKNESS	RADIUS
MM	MM	MT	MM	KGS	Bar	At23C	MM	MM
20	25	50	3	0.26	-1~6	18	2.5	100
25	30	50	3	0.28	-1~6	18	2.5	100
30	35	50	3.3	0.33	-1~6	18	2.5	120
35	41	50	3.7	0.46	-1~6	18	3	140
40	46	50	4	0.52	-1~6	18	3	160
45	53	50	5	0.60	-1~6	18	4	180
50	58	50	5	0.80	-1~6	18	4	250
60	68	50	5	0.90	-1~6	18	4	300
70	78	50	5	1.15	-1~5	18	4	350
75	85	50	5.5	1.37	-1~5	15	5	375
80	90	50	5.5	1.68	-1~4	12	5	400
90	100	30	6	1.75	-1~4	12	5	450
100	111	30	6	2.00	-1~4	12	5.5	500
125	139	30	8	3.14	-1~4	12	7	700


PANDAVIEW

EST.2005

PVC SUCTION HOSE INDUSTRY GRADE II

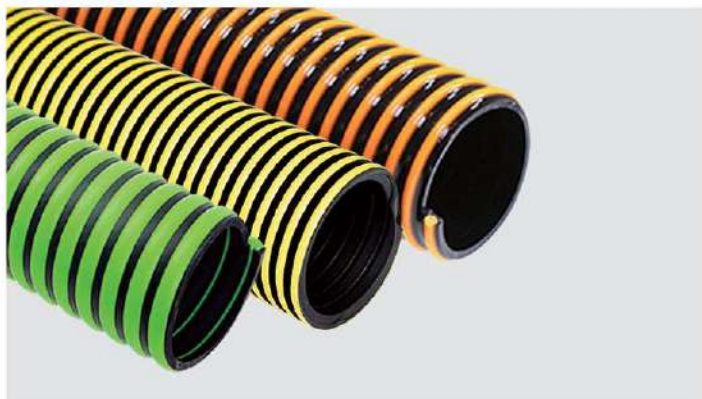

Material: PVC
Usage: water, oil ,Liquid and powder of industry engineering and sanitation lines
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Don’ t change color. No smell and non-toxic. Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 水，各类工业液体和粉末
产品特点: 高透明，柔软塑筋增强管，不变色，无味无毒。-5 至65摄氏度内应用。
应用范围: 通水，抗洪排水，泥沙，粉末，汽油。


SPECIFICATION:

I.D.	O.D.	LENGTH	OVALSPRING DIAMATER	WEIGHT/MT	W.P.	B.P(Bar)	WALL THICKNESS	RADIUS
MM	MM	MT	MM	KGS	Bar	At23C	MM	MM
20	25	50	2.3	0.25	-1~6	18	2.5	100
25	30	50	2.3	0.26	-1~6	18	2.5	100
30	35	50	2.3	0.30	-1~6	18	2.5	120
35	41	50	2.5	0.42	-1~6	18	3	140
40	46	50	2.5	0.50	-1~6	18	3	160
45	53	50	3.5	0.55	-1~6	18	4	180
50	60	50	4.5	0.85	-1~6	18	5	250
70	81	50	5	1.37	-1~6	18	5.5	300
75	87	50	5.5	1.50	-1~6	18	6	350
80	93	50	6	1.72	-1~6	18	6.5	375
90	103	30	6	2.06	-1~6	18	6.5	400
100	114	30	6.5	2.50	-1~6	18	7	450
110	125	30	7	2.80	-1~6	18	7.5	500
125	141	30	7.5	3.20	-1~6	18	8	700
150	168	30	8	5.00	-1~5	18	9	1000
200	223	10	10	8.00	-1~5	15	11.5	2000

PANDAVIEW

EST.2005

PVC SUCTION HOSE HEAVY DUTY

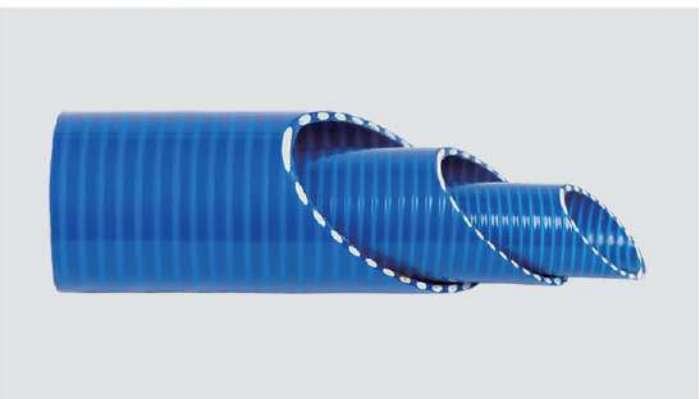

Material: PVC
Usage: water, oil ,Liquid and powder of industry engineering and sanitation lines
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Don’ t change color. No smell and non-toxic. Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 水，各类工业液体和粉末
产品特点: 高透明，柔软塑筋增强管，不变色，无味无毒。-5 至65摄氏度内应用。
应用范围: 通水，抗洪排水，泥沙，粉末，汽油，石油开采。

SPECIFICATION:

I.D.	O.D.	LENGTH	OVALSPRING DIAMATER	WEIGHT/MT	W.P.	B.P(Bar)	WALL THICKNESS	RADIUS
MM	MM	MT	MM	KGS	Bar	At23C	MM	MM
60	70	50	5	1.3	-1~6	18	5	300
70	82	50	5.5	1.48	-1~6	18	6	350
75	87	50	6	1.50	-1~6	18	6	375
90	103	50	6	2.06	-1~6	18	6.5	400
100	114	30	6.5	2.63	-1~6	18	7	450
110	125	30	7	3.00	-1~6	18	7.5	500
125	141	30	7.5	3.50	-1~6	18	8	700
150	166	30	7.5	4.90	-1~5	18	8	1000
200	223	10	10	9.00	-1~5	15	11.5	2000


PANDAVIEW

EST.2005

PVC SUCTION AIR HOSE



Material: PVC
Usage: For conveyance of Air
Features: Very soft hose with thin wall thickness, very small bending radius, inner surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 80°C.
Usage icon:

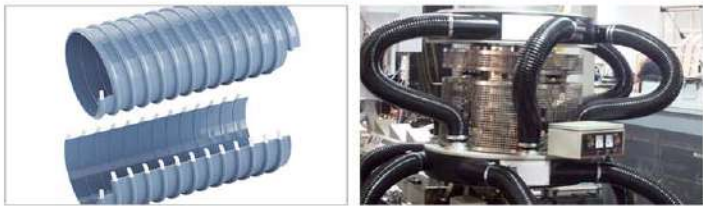

材质: PVC
用途: 通风
产品特点: 超级柔软塑筋增强管，不变硬，无味无毒。-5至80摄氏度内应用。
应用范围: 工业设备，通风，粉尘。

SPECIFICATION:

Size	I.D.	O.D.	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
25/32	20	0.70	0.120	30	1.50	0.55	25
1	25	0.70	0.175	38	1.50	0.55	25
1-1/4	30	0.70	0.210	45	1.40	0.55	25
1-1/4	32	0.80	0.220	48	1.40	0.50	25
1-1/2	35	0.80	0.255	53	1.30	0.50	25
1-1/2	38	0.80	0.265	57	1.30	0.50	25
1-1/2	40	0.90	0.290	60	1.30	0.50	25
2-1/4	45	0.90	0.355	68	1.30	0.50	25
2	50	0.90	0.410	75	1.30	0.50	25
2-1/2	60	0.90	0.530	90	1.20	0.45	25
2-1/2	63	0.90	0.530	95	1.10	0.45	25
2-3/4	70	0.90	0.640	105	1.10	0.45	25
3	75	1.00	0.700	113	1.10	0.40	25
3-1/4	80	1.00	0.730	120	1.00	0.40	25
3-1/2	90	1.00	0.780	135	1.00	0.40	25
4	100	1.00	0.980	150	1.00	0.40	25
4-1/2	110	1.00	1.100	165	0.90	0.40	10
4-3/4	120	1.00	1.280	180	0.70	0.35	10

Size	I.D.	O.D.	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
5	125	1.00	1.300	188	0.70	0.35	10
5-1/2	140	1.10	1.540	210	0.50	0.35	10
6	150	1.10	1.700	225	0.50	0.35	10
6-1/2	160	1.20	1.820	240	0.50	0.35	10
7	180	1.20	2.100	270	0.40	0.30	10
8	200	1.20	2.170	300	0.30	0.30	10
10	250	1.20	3.400	375	0.20	0.30	10
12	300	1.60	3.600	400	0.15	0.20	10


PANDAVIEW

EST.2005

PVC SUCTION DUST HOSE



Material: PVC
Usage: For conveyance of Air
Features: Very soft hose with thin wall thickness, very small bending radius, inner surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -23°C to 80°C.
Usage icon:



材质: PVC
用途: 通风
产品特点: 超级柔软塑筋增强管，不变硬，无味无毒。-23至80摄氏度内应用。
应用范围: 工业设备，通风，粉尘。

SPECIFICATION:

Size	I.D.	O.D.	Weight	Radius	W.P.	W.P.	Tape thickness
Inch	mm	mm	kg/m	mm	bar	bar	m
1	25	30	0.19	35	0.6	1.8	1.0
1-1/4	32	37	0.3	40	0.55	1.6	1.0
1-1/2	38	43	0.35	45	0.5	1.5	1.0
2	50	57	0.57	60	0.35	1.3	1.0

PANDAVIEW GARDEN



Shovel



Hand tools



Shears



Hose Connector



Spray gun



Garden hose

PANDAVIEW EST.2005 EUROPEAN STYLE GARDEN HOSE POPULAR



Material: PVC
Usage: Irrigation for garden, agriculture plant
Features: Very soft hose with new material, inner black with outer transparent green color, small bending radius. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 花园灌溉, 园林灌溉
产品特征: 全新料, 超柔软纤维增强花园管, 内黑外透明绿色。不变色, 无味无毒, -5 至65摄氏度内应用。
应用范围: 通水, 花园喷洒, 农业灌溉。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/2	12	16	0.119	15	45	11.9	100
5/8	15	19	0.144	15	45	14.4	100
5/8	15	20	0.185	15	45	18.5	100
3/4	19	24	0.228	15	45	22.8	100
3/4	19	25	0.280	20	60	28.0	100
1"	25	32	0.423	15	45	21.1	50

PANDAVIEW EST.2005 EUROPEAN STYLE GARDEN HOSE II



Material: PVC
Usage: Irrigation for garden, agriculture plant
Features: Very soft hose with new material, 5 layers, inner green/white with outer green color, small bending radius. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:




材质: PVC
用途: 花园灌溉, 园林灌溉
产品特征: 全新料, 超柔软纤维5层增强花园管, 内绿色/白色, 外不透明绿色。不变色, 无味无毒, 5至65摄氏度内应用。
应用范围: 通水, 花园喷洒, 农业灌溉。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/2	12	17	0.154	15	45	15.40	100
5/8	15	20	0.185	15	45	18.50	100
3/4	19	25	0.28	20	60	28.00	100
1"	25	32	0.423	15	45	21.50	50

PANDAVIEW EST.2005 GARDEN HOSE NON-TORSION

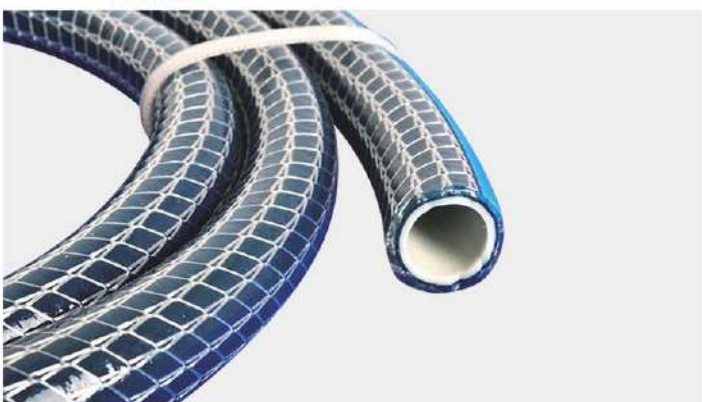

Material: PVC
Usage: Irrigation for garden, agriculture plant
Features: Very soft hose with new material, inner green/white with outer green color, small bending radius. Non-torsion. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 花园灌溉, 园林灌溉
产品特征: 全新料, 超柔软纤维增强花园管, 防扭曲。内绿色/白色, 外不透明绿色。不变色, 无味无毒, -5至65摄氏度内应用。
应用范围: 通水, 花园喷洒, 农业灌溉。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/2	12	16	0.119	15	45	11.9	100
1/2	13	17	0.127	15	45	12.7	100
5/8	15	19	0.144	15	45	14.4	100
5/8	15	20	0.185	15	45	18.5	100
3/4	19	24	0.228	15	45	22.8	100
3/4	19	25	0.280	20	60	28.0	100
1"	25	32	0.423	15	45	21.1	50

PANDAVIEW

EST.2005

MIDDLE EAST STYLE GARDEN HOSE POPULAR



Material: PVC
Usage: Irrigation for garden, agriculture plant
Features: Soft hose with new material, small bending radius, inner black with outer yellow color. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 花园灌溉, 园林灌溉
产品特征: 全新料, 柔软纤维增强管, 内黑外黄色, 不变色, 无味无毒, -5 至65摄氏度内应用。
应用范围: 通水, 花园喷洒, 农业灌溉。

SPECIFICATION:

Size		Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch		I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/2		12	16	0.119	15	45	11.9	100
1/2		13	17	0.127	15	45	12.7	100
5/8		15	19	0.144	15	45	14.4	100
5/8		15	20	0.185	15	45	18.5	100
3/4		19	24	0.228	15	45	22.8	100
3/4		19	25	0.280	20	60	28.0	100
1"		25	32	0.423	15	45	21.1	50

PANDAVIEW

EST.2005

CANADA/US STYLE GARDEN HOSE



Material: PVC
Usage: Irrigation for garden, agriculture plant
Features: Very soft hose with new material, small bending radius, inner & outer surface smoothly. Will not change color. No smell and non-toxic. Application under Celsius -5°C to 65°C.
Usage icon:



材质: PVC
用途: 花园灌溉, 园林灌溉
产品特征: 全新料, 超柔软纤维增强管, 不变色, 无味无毒, -5 至65摄氏度内应用。
应用范围: 通水, 花园喷洒, 农业灌溉。

SPECIFICATION:

Size		Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch		I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/2		12	16	0.119	15	45	11.9	100
1/2		13	17	0.127	15	45	12.7	100
5/8		15	19	0.144	15	45	14.4	100
5/8		15	20	0.185	15	45	18.5	100
3/4		19	24	0.228	15	45	22.8	100
3/4		19	25	0.280	20	60	28.0	100
1"		25	32	0.423	15	45	21.1	50

PANDAVIEW

EST.2005

EXPANDABLE GARDE HOSE II



*** DESIGNED TO MAKE YOUR LIFE EASIER:** The newest design expandable water hose pipe never tangles, twists or kinks. Only 1.8 lbs, after getting your work done, just simply rewind it into a basket or hose hanger. Lightweight, collapsible, easy storage makes your life easier.

*** A RETRACTABLE HOSE SUITABLE FOR MULTIPLE PURPOSES:** Expanding quickly, while a brass valve at the end allows better control of the flow of water, flexible length and proper water flow to support multiple purposes, such as gardening, watering, car/boat washing, pet bathing or pool cleaning, returns to original length in seconds when the water is out, an amazing hose you will never regret buying.

Product Name	Expandable garden hose pipe pro
Color of Hose	Green, Blue, Grey, Black, Red and OEM
Garden Water Hose's Package	Color Box, Poly Box, Opp Bag
Connector Type of Garden Water Hose	US-Standard, Euro-Standard, Asian-Standard
Features of Garden Water Hose	Lightweight, Knik-free, Adjustable, Anti-Abrasion, Rewindable, Soft
Advantage	Super lightweight and 3 times automatically expands
Size of Garden Water Hose	25FT, 50FT, 75FT, 100FT and OEM
Application	Washing Car, Watering Garden

Details Images

OUTSIDE FABRIC OF EXPANDBALE GARDEN HOSE

The material is Polyester.

Normally, there are three types: 32spindle*5000D, 48 spindle*3750D, and 48spindel*2500D.

"Spinde" Refers to the quantity of yarn, "D" refers to the Density

Through the test, the 48spindle*3750D is best quality. 48spindle*2500D is economical.

INNER HOSE OF EXPANDBALE GARDEN HOSE

The material is TPE or Latex

TPE: The working pressure is 2bar Latex: The working pressure is 4bar

Double Latex and Triple latex are the two popupalr types.

Through the teset, Double Latex is better than Triple Latex. All in all, the quality of latex is higher than TPE

3X EXPANDING
WITH DIFFERENT FABRICS



Related Products

HOSES
MORE KINDS
MORE DETAILS
PLEASE INQUIRE

Dark Green

Grey

Dark Blue

NOZZLES
MORE KINDS
MORE DETAILS
PLEASE INQUIRE

Plastic 7-Function

Plastic 8-Function

Plastic 9-Function

Black & Green

Pink & Blue

Red & Black

Green & Blue

Metal Pressurized

Metal 8-Function

Metal 9-Function

Metal 8-Function

3/4 CONNECTORS
MORE KINDS
MORE DETAILS
PLEASE INQUIRE

FHC901

FHC902

FHC903

FHC904

FHC905

FHC906

FHC907

ACCESSORIES
MORE KINDS
MORE DETAILS
PLEASE INQUIRE

2-Way Splitter

2-Way Splitter

4-Way Splitter

Hose Hanger

Hanger with Sprayer

Hanger with Sprayer

Hose Reel

PACKAGES
MORE KINDS
MORE DETAILS
PLEASE INQUIRE

Mail Box

Fenestration Color Box

Color Box

Round Box

PVC Box

PVC Bag with header

Storage Bag


PANDAVIEW

EST.2005

SILICON SUCTION DUCT HOSE(TRADING)



Material: SILICON rubber
Usage: For conveyance of Air
Features: Very soft hose with thin wall thickness, very small bending radius, inner surface smoothly. Anti-high tempreature. No smell and non-toxic. Application under Celsius -70°C to 300°C.
Usage icon:



材质: PVC
用途: 通风
产品特点: 超级柔软塑筋增强管，不变硬，无味无毒。-70 至300摄氏度内应用。
应用范围: 工业设备，通风，粉尘。

SPECIFICATION:

Size	I.D.	Wall	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
1	25	0.4	0.27	43	2.7	0.7	4
1-1/4	32	0.4	0.28	54	2.7	0.7	4
1-1/2	38	0.4	0.31	64	2.7	0.7	4
1-3/4	43	0.4	0.32	46	2.7	0.7	4
1-3/4	45	0.4	0.33	64	2.7	0.7	4
2	50	0.4	0.38	84	2.6	0.64	4
2-1/4	57	0.4	0.41	84	2.6	0.64	4
2-1/2	60	0.4	0.46	102	2.6	0.64	4
2-3/4	65	0.4	0.49	110	2.6	0.6	4
2-3/4	70	0.4	0.55	125	2.6	0.6	4
3	76	0.4	0.58	130	2.5	0.6	4
3-1/4	80	0.4	0.64	132	2.5	0.6	4
3-1/2	90	0.4	0.69	141	2.5	0.5	4
4	102	0.4	0.77	160	2.3	0.5	4
4-1/2	115	0.4	0.81	180	2.3	0.5	4
5	127	0.6	0.91	199	2.3	0.45	4
5-1/4	133	0.6	0.96	220	2.0	0.4	4
5-1/2	140	0.6	1.01	230	1.8	0.4	4
6	152	0.6	1.05	237	1.7	0.35	4
6-1/2	160	0.6	1.13	258	1.5	0.3	4
6-1/2	165	0.6	1.16	266	1.2	0.3	4
7	180	0.6	1.28	276	1.1	0.28	4
8	203	0.6	1.45	313	1.1	0.15	4
9	220	1.0	1.63	330	1.0	0.12	4
10	254	1.0	1.88	390	0.8	0.1	4
12	305	1.0	2.05	466	0.6	0.09	4

PANDAVIEW

EST.2005

PVC NYLON SMOKE HOOD HOSES(TRADING)



Material: PVC coated nylon fabric.
Usage: For conveyance of Air
Features: Very soft hose with thin wall thickness, very small bending radius, inner surface smoothly. Will not become hard, No smell and non-toxic. Application under Celsius -20°C to 100°C.
Usage icon:



材质: 尼龙帆布+PVC涂层
用途: 通风
产品特点: 超级柔软塑筋增强管，不变硬，无味无毒。-20 至100摄氏度内应用。
应用范围: 工业设备，通风，粉尘。

SPECIFICATION:

Size	I.D.	Wall	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
2	50	0.3	0.38	54	2.4	1.5	10
2-1/2	63	0.3	0.49	66	1.95	1.5	10
3	75	0.3	0.58	79	1.6	1.4	10
3-1/2	90	0.3	0.69	83	1.5	1.3	10
4	102	0.3	0.77	93	1.4	1.2	10
4-1/2	115	0.3	0.81	105	1.2	1.1	10
5	127	0.3	0.91	118	1.1	1.0	10
6	152	0.3	1.05	158	1.0	0.95	10
6-1/2	160	0.3	1.13	166	1.0	0.95	10
7	180	0.3	1.28	186	1.0	0.95	10
8	203	0.3	1.45	209	0.9	0.7	10
10	254	0.3	1.88	261	0.7	0.6	10
12	305	0.4	2.05	312	0.65	0.55	10
14	350	0.4	2.50	363	0.5	0.4	10
16	400	0.4	3.00	413	0.5	0.35	10

PANDAVIEW

EST.2005

FIBER &METAL DUCT HOSE(TRADING)



Material: PVC coated polyester fabric.
Usage: For conveyance of Air
Features: Very soft hose with thin wall thickness, very small bending radius, inner surface smoothly. Anti-high temperature. No smell and non-toxic. Celsius -20°C to 80°C.
Usage icon:

machinery

air

powder

dust

材质：PVC+聚酯帆布
用途：通风
产品特点：超级柔软塑筋增强管，不变硬，无味无毒。
-20 至80摄氏度内应用。
应用范围：工业设备，通风，粉尘。

■ SPECIFICATION:

Size	I.D	Wall	Radius	W.P.	W.P.	Length
Inch	mm	mm	mm	bar	bar	m
4	102	0.4	153	0.6	0.1	20
5	127	0.4	190	0.6	0.1	20
6	152	0.4	228	0.6	0.1	20
6-1/2	160	0.4	238	0.5	0.1	20
7	180	0.4	267	0.5	0.1	20
8	203	0.4	304	0.5	0.1	20
10	254	0.5	381	0.45	0.08	20
12	305	0.5	457	0.45	0.08	20
14	350	0.5	543	0.4	0.08	20
16	400	0.5	609	0.4	0.08	20
18	450	0.6	685	0.35	0.07	20
20	500	0.6	762	0.35	0.07	20
24	600	0.6	915	0.3	0.07	20
28	700	0.6	1066	0.25	0.05	20
32	800	0.8	1218	0.2	0.04	20
45	1100	0.8	1677	0.15	0.03	20
50	1200	0.8	2050	0.1	0.01	20


PANDAVIEW

EST.2005

PU CLEAR HOSE FOOD GRADE



Material: PU
Usage: For conveyance of liquid +Foods, beverages, food oil, drinking water, also for Mining and water conservancy, civil engineering, petroleum, chemical, sanitation and other industries
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -35°C to 90°C. Hardness from 80-90 shore degree.
Usage icon:



材质：PU
用途：各类液体食品， 酒水饮料，饮用水，食用油，也可以用于工矿和水利、土木工程，石油、化工、卫生等行业
产品特点：高透明，柔软单体管，不变色，无味无毒，不含邻苯。-35 至90摄氏度内应用。
应用范围：自来水，饮料，啤酒，食用油，粉末，奶，空气。


■ SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/8	2	4	0.014	5	14	1.4	100
1/8	3	5	0.016	5	14	1.6	100
5/32"	4	6	0.020	5	14	2.0	100
3/16"	5	7	0.025	5	14	2.5	100
1/4	6	8	0.030	5	14	3.0	100
5/15	8	10	0.039	5	14	3.9	100
3/8	10	12	0.047	5	14	4.7	100
1/2	12	15	0.087	5	14	8.7	100
5/8	15	18	0.106	5	14	5.3	50
3/4	19	22	0.132	5	14	6.6	50
1	25	31	0.361	4	12	18.1	50
1-1/4	32	38	0.452	4	12	22.6	50
1-1/2	38	44	0.529	4	12	26.5	50
2	50	58	0.929	3	12	37.2	40

PANDAVIEW

EST.2005

PU BRAIDED HOSE FOOD GRADE

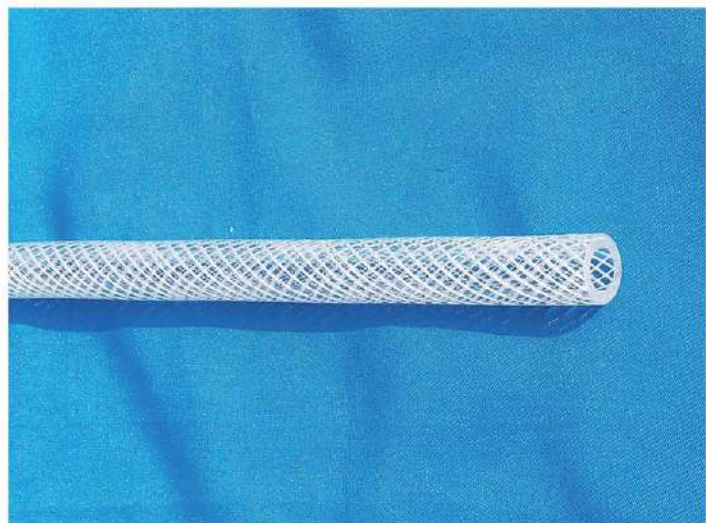

Material: PU
Usage: For conveyance of liquid +Foods, beverages, food oil, drinking water, also for Mining and water conservancy, civil engineering, petroleum, chemical, sanitation and other industries
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -35°C to 90°C. Hardness from 80-90 shore degree.

Usage icon:



材质: PU
用途: 各类液体食品, 酒水饮料, 饮用水, 食用油, 也可以用于工矿和水利、土木工程、石油、化工、卫生等行业
产品特征: 高透明, 柔软单体管, 不变色, 无味无毒, 不含邻苯。-35 至90摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 食用油, 粉末, 奶, 空气。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/4"	6	10	0.068	9	27	6.8	100
5/16"	8	12	0.085	9	27	8.5	100
3/8"	9	13	0.093	9	27	9.3	100
13/32"	10	14	0.102	8	24	10.2	100
1/2"	12	16	0.119	8	24	11.9	100
1/2"	12	17	0.154	9	27	15.4	100
35/64"	14	19	0.175	8	24	17.5	100
5/8"	15	19	0.144	7	21	14.4	100
5/8"	15	20	0.185	8	24	18.5	100
45/64"	18	24	0.267	6	18	26.7	100
3/4	19	24	0.228	6	18	13.7	60
3/4	19	25	0.280	5	15	16.8	60
25/32"	20	25	0.238	6	18	14.3	60
25/32"	20	26	0.292	6	18	17.5	60
1"	25	30	0.291	4	12	17.5	60
1-1/4"	32	39	0.527	4	12	26.3	50
1-1/2"	38	45	0.616	4	12	30.8	50
1-1/2"	38	46	0.712	4	12	35.6	50
1-3/4"	45	55	1.060	4	12	53.0	50
2"	50	58	0.916	3	9	27.5	30

PANDAVIEW


EST.2005

PU STEEL WIRE HOSE FOOD GRADE



Material: PU
Usage: For conveyance of liquid +Foods, beverages, food oil, drinking water, also for Mining and water conservancy, civil engineering, petroleum, chemical, sanitation and other industries
Features: Very soft hose with high transparency, small bending radius, inner &outer surface smoothly. Will not change color. No smell and non-toxic. Phthalate free. Application under Celsius -35°C to 90°C. Hardness from 80-90 shore degree.

Usage icon:

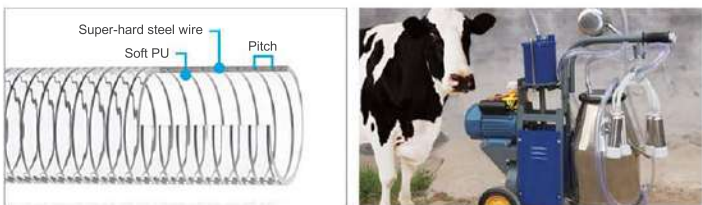

材质: PU
用途: 各类液体食品, 酒水饮料, 饮用水, 食用油, 也可以用于工矿和水利、土木工程、石油、化工、卫生等行业
产品特征: 高透明, 柔软单体管, 不变色, 无味无毒, 不含邻苯。-35 至90摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 食用油, 粉末, 奶, 空气。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
1/2	12	18	0.218	-1~10	30	15	21.8	100
5/8	15	22	0.313	-1~10	30	15	31.3	100
3/4	19	25	0.319	-1~10	30	15	31.9	100
1	25	32	0.482	-1~7	23	13	24.1	50
1-1/4	32	40	0.696	-1~7	23	13	34.8	50
1-1/2	38	48	1.040	-1~6	20	13	52.0	50
1-3/4	45	56	1.313	-1-6	20	10	52.5	40
2	50	61	1.476	-1~5	15	9	73.8	50
2-3/8	60	74	2.268	-1~5	15	9	113.4	50
2-1/2	63	80	2.939	-1~5	15	9	146.9	50
3	75	90	2.992	-1~4	13	8	119.7	40
3-1/2	90	108	4.309	-1~4	13	8	172.3	40
4	100	116	4.178	-1~3	10	6	125.3	30
5	127	143	5.222				156.7	30
6	152	168	6.190				123.8	20

PANDAVIEW PU POPULAR REINFORCED AIR HOSE



Material: PU
Usage: oil, Liquid, air and machine part of industry engineering and sanitation lines
Features: Very soft hose with new material, small bending radius, inner & outer surface smoothly. High pressure. Will not change color. No smell and non-toxic. Application under Celsius -35°C to 90°C. Hardness from 80-90 shore degree.

Usage icon:



材质: PU
用途: 油, 空气, 机械配件和各类液体
产品特点: 高透明, 柔软纤维增强管, 不变色, 无味无毒。-30 至90摄氏度内应用。
应用范围: 机械, 空气, 工具, 油。

■ SPECIFICATION:


Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
13/64	5	9	0.055	25	75	50	2.75	50
1/4	6	10	0.063	25	75	50	3.14	50
5/16	8	12	0.079	25	75	50	3.93	50
3/8	9	13	0.086	20	60	40	4.32	50
13/32	10	14	0.094	20	60	40	4.71	50
1/2	12	16	0.110	20	60	40	5.50	50
5/8	16	21	0.182	15	45	30	9.08	50
3/4	19	25	0.259	15	45	30	12.95	50

PANDAVIEW PU SPIRAL AIR HOSE



Material: PU
Usage: oil ,Liquid, air tools and machine of industry engineering.
Features: Easy use, save stock space, will rebound autom-atically after using and elongating.No smell and non-toxic.

Usage icon:

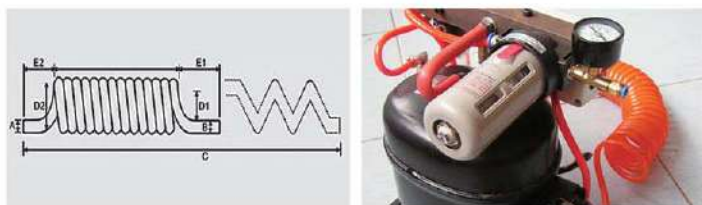

材质: PU
用途: 油, 空气, 机械配件和气动工具。
产品特点: 使用方便, 节省库存空间, 使用和伸长后会自动回弹, 无异味, 无毒。
应用范围: 机械, 空气, 工具。

■ SPECIFICATION:

Size	Size		W.P		B.P		Size available
Inch	I.D.	O.D.	Bar	Bar	Bar	Bar	Meter
13/64	4	6	116	8	350	24	6/9/12/15M
1/4	5	8	116	8	350	24	6/9/12/15M
5/16	6.5	10	116	8	350	24	6/9/12/15M
3/8	8	12	116	8	350	24	6/9/12/15M

PANDAVIEW PU PNEUMATIC HOSES



Material: PU
Usage: PU tube is applicable to occasions of big bending, temperature-resistance, anti-tubing, anti-vibration and Twist resistance, PU tube suitable for various of fittings.
Features: The tube processed by Polyurethane, with very good elasticity, , easy for pipingwork and flexible in application.

Usage icon:



材质: PU
用途: 适用于大弯曲、耐温、抗管、抗振、抗扭的场合, PU管适用于各种管件。
产品特点: PU管由聚氨酯加工而成, 具有很好的弹性, 易于配管等应用灵活。
应用范围: 机械, 空气, 工具, 油。

■ SPECIFICATION:

Order Model	Outside Diameter	Inside Diameter	Wall Thickness	Bursting Pressure	Working Pressure	Bend	Kg/volume	Volumebox	Volume of Wood
	MM	MM	MM	Cap	Cap	MM	KG/PCS	PCS	M ³
PU4x2.5/200M	4	2.5	0.75	30	10	12	1.8	10	0.09
PU5x3/200M	5	3	1	30	10	15	2.4	6	0.09
PU6x4/200M	6	4	1	30	10	15	3.8	6	0.09
PU8x5/100M	8	5	1.5	30	10	20	3.8	6	0.09
PU8x5.5/100M	8	5.5	1.25	24	8	25	3.2	6	0.09
PU8x6/100M*	8	6	1	21	7	30	2.7	6	0.09
PU10x6.5/100M	10	6.5	1.75	30	10	30	5.6	4	0.09
PU10x7/100M*	10	7	1.5	24	8	32	4.9	4	0.09
PU10x8/100M*	10	8	1	21	7	35	3.5	4	0.09
PU12x8/100M	12	8	2	30	10	35	7.6	4	0.12
PU12x9/100M*	12	9	1.5	21	7	40	6.2	4	0.12
PU16x12/100M	16	12	2	24	8	40	11	3	0.15
PU16x13/100M	16	13	1.5	18	6	50	8.5	3	0.15
PU1/4-200M	6.3	4.5	0.9	30	10	15	3.8	6	0.09
PU5/16-100M	8	5	1.5	30	10	20	3.8	6	0.09
PU3/8-100M	9.5	6.5	1.5	21	7	30	4.7	4	0.09
PU1/2-100M	12.6	9.6	1.5	21	7	40	7.0	4	0.12

PANDAVIEW

EST.2005

PU WOODEN MACHINE DUCT HOSE



Material: TPU
Usage: For conveyance of Air
Features: steel wire reinforced, very soft hose with 0.4MM-0.6MM wall thickness, extremely abrasion-resistant; High tensile and burst strength and tearing resistant; Could be static electricity conductive by grounding ; Resistant to oil and fuel; extremely flexible and compressible; Small bending radius; Free of plasticizer; Free of halogen; No smell and non-toxic. Application under Celsius -35°C to 85°C.
Usage icon:



材质: 聚氨酯
用途: 通风
产品特点: 0.4毫米-0.6毫米超级柔软钢丝增强通风管, 极耐磨损; 高抗拉强度, 抗爆强度和抗撕裂性; 通过接地可以导电; 耐油和燃料; 极高的柔韧性和可压缩性; 弯曲半径小; 不含增塑剂; 不含卤素; 无臭, 无毒。适用于摄氏-35C至85C。
应用范围: 工业, 通风, 粉尘。



SPECIFICATION:

Size	I.D.	Wall	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
1	25	0.4	0.27	43	2.7	0.7	10
1-1/4	32	0.4	0.28	54	2.7	0.7	10
1-1/2	38	0.4	0.31	64	2.7	0.7	10
1-3/4	40	0.4	0.32	46	2.7	0.7	10
2	50	0.4	0.38	84	2.6	0.64	10
2-1/2	60	0.4	0.46	102	2.6	0.64	10
2-3/4	70	0.4	0.55	125	2.6	0.6	10
3	75	0.4	0.58	130	2.5	0.6	10
3-1/4	80	0.4	0.64	132	2.5	0.6	10
3-1/2	90	0.4	0.69	141	2.5	0.5	10
4	102	0.4	0.77	160	2.3	0.5	10
4-1/2	110	0.4	0.81	180	2.3	0.5	10
5	127	0.6	0.91	199	2.3	0.45	10
5-1/4	130	0.6	0.96	220	2.0	0.4	10
5-1/2	140	0.6	1.01	230	1.8	0.4	10
6	152	0.6	1.05	237	1.7	0.35	10
6-1/2	160	0.6	1.13	258	1.5	0.3	10
7	180	0.6	1.28	276	1.1	0.28	10
8	203	0.6	1.45	313	1.1	0.15	10
9	220	1.0	1.63	330	1.0	0.12	10
10	254	1.0	1.88	390	0.8	0.1	10
12	305	1.0	2.05	466	0.5	0.09	10
14	350	1.0	2.88	490	0.5	0.1	10
16	400	1.0	3.35	566	0.5	0.09	10

PANDAVIEW

EST.2005

PU SUCTION HOSE



Material: TPU
Usage: For conveyance Gaseous and liquid products; Abrasive solids such as dusts, powders, chips and grains
Features: Very soft hose with thin wall thickness, very small bending radius, plastic spring wire reinforced, inner surface smoothly. Anti-high temperature. No smell and non-toxic, Phthalate free. Application under Celsius -20°C to 70°C.
Usage icon:



材质: 聚氨酯
用途: 气态和液态产品; 磨料固体, 例如粉尘, 粉末, 碎屑和谷物
产品特点: 超级柔软塑筋增强通风管, 不变硬, 无味无毒。-20 至70摄氏度内应用。
应用范围: 自来水, 饮料, 啤酒, 牛奶, 食用油, 粉末, 空气。



SPECIFICATION:

Size	I.D.	Wall	Weight	Radius	W.P.	W.P.	Length
Inch	mm	mm	kg/m	mm	bar	bar	m
1	25	0.80	0.175	35	1.60	0.55	20
1-1/4	32	0.80	0.220	50	1.60	0.50	20
1-1/2	38	0.80	0.265	55	1.60	0.50	20
2	50	0.90	0.410	110	1.50	0.50	20
2-1/2	63	0.90	0.530	163	1.50	0.45	20
3	75	0.90	0.700	190	1.50	0.40	20
3-1/2	90	0.90	0.780	220	1.50	0.40	20
4	100	1.00	0.980	240	1.00	0.40	20
5	125	1.00	1.300	400	1.00	0.35	20
6	150	1.00	1.700	350	0.80	0.35	20
7	180	1.10	2.100	500	0.80	0.30	20
8	200	1.10	2.170	550	0.70	0.30	20

PANDAVIEW

EST.2005

SILICON CLEAR HOSE FOOD & MEDICAL



Material: SILICON
Usage: For conveyance of liquid Foods and beverages
Features: Highly transparent food-grade silicone tube, non-toxic, odorless, soft, good elasticity, resistant to kink and deformation, small bending radius; The product can be in direct contact with food; High transparency, no yellowing at room temperature, no frost, no whitening, no fading; There is no scale in the long-term water, which meets the food inspection standards. Phthalate free. Celsius -40°C to 200°C.

Usage icon:



材质: 硅橡胶
用途: 各类液体食品和酒水饮料
产品特征: 无毒、无气味, 柔软, 弹性好, 耐扭结不变形, 可与食物直接接触; 透明度高, 常温放置不变黄、不喷霜、不吐白、不退色, 久置水中无水垢, 符合食品检测标准。不含邻苯。-40 至200摄氏度内应用。
应用范围: 食品级, 医疗级各类液体, 空气, 饮用水, 饮料, 啤酒, 饮料等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
	3	6	0.030	5	14	2.97	100
3/16"	5	8	0.043	5	14	4.29	100
1/4	6	9	0.049	5	14	4.95	100
5/15	8	12	0.088	5	14	8.79	100
	9	13	0.097			9.67	100
3/8	10	15	0.137	5	14	13.74	100
	11	16	0.148			14.84	100
1/2	12	17	0.159	5	14	15.94	100
5/8	15	20	0.192	5	14	9.62	50
	16	22	0.251			12.53	50
3/4	19	26	0.346	5	14	17.31	50
	20	27	0.362			18.08	50
1	25	33	0.510	4	12	25.50	50

PANDAVIEW


EST.2005

SILICON BRAIDED HOSE FOOD & MEDICAL



Material: SILICON
Usage: For conveyance of liquid Foods and beverages
Features: Highly transparent food-grade silicone tube, non-toxic, odorless, soft, good elasticity, resistant to kink and deformation, small bending radius; The product can be in direct contact with food; High transparency, no yellowing at room temperature, no frost, no whitening, no fading; There is no scale in the long-term water, which meets the food inspection standards. Phthalate free. Celsius -40°C to 200°C.

Usage icon:



材质: 硅橡胶
用途: 各类液体食品和酒水饮料
产品特征: 无毒、无气味, 柔软, 弹性好, 耐扭结不变形, 可与食物直接接触; 透明度高, 常温放置不变黄、不喷霜、不吐白、不退色, 久置水中无水垢, 符合食品检测标准。不含邻苯。-40 至200摄氏度内应用。
应用范围: 食品级, 医疗级各类液体, 空气, 饮用水, 饮料, 啤酒, 饮料等。

SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P	Weight/Roll	M/Roll
Inch	I.D.	O.D.	Kgs	Bar	At 23C	Kgs	Meter
1/4"	6	12	0.119	9	27	11.87	100
5/16"	8	14	0.145	9	27	14.51	100
3/8"	9	15	0.158	9	27	15.83	100
1/2"	12	18	0.198	8	24	19.78	100
5/8	15	22	0.285	8	24	28.46	100
3/4	19	26	0.346	6	18	20.77	60
25/32"	22	29	0.392	6	18	23.54	60
1"	25	33	0.510	4	12	30.60	60
1-1/2"	32	40	0.633	4	12	31.65	50

PANDAVIEW


EST.2005

STEEL WIRE HOSE FOOD & MEDICAL



Material: SILICON
Usage: For conveyance of liquid Foods and beverages
Features: Highly transparent food-grade silicone tube, non-toxic, odorless, soft, good elasticity, resistant to kink and deformation, small bending radius; The product can be in direct contact with food; High transparency, no yellowing at room temperature, no frost, no whitening, no fading; There is no scale in the long-term water, which meets the food inspection standards. Phthalate free. Celsius -40°C to 200°C.

Usage icon:



材质: 硅橡胶
用途: 各类液体食品和酒水饮料
产品特征: 无毒、无气味，柔软，弹性好，耐扭结不变形，可与食物直接接触；透明度高，常温放置不变黄、不喷霜、不吐白、不退色，久置水中无水垢，符合食品检测标准。不含邻苯。-40 至200摄氏度内应用。
应用范围: 食品级，医疗级各类液体，空气，饮用水，饮料，啤酒，饮料,粉末食品，药品原料等。




SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	W.P.	B.P (Bar)		Weight/Roll	M/Roll
	I.D.	O.D			At 23C	At 60C		
Inch	I.D.	O.D	Kgs	Bar	At 23C	At 60C	Kgs	Meter
1/2	12	20	0.218	-1~10	30	15	21.8	100
5/8	15	23	0.313	-1~10	30	15	31.3	100
3/4	19	27	0.319	-1~10	30	15	31.9	100
1	25	33	0.482	-1~7	23	13	24.1	50
1-1/4	32	40	0.696	-1~7	23	13	34.8	50
1-1/2	38	48	1.040	-1~6	20	13	52.0	50
1-3/4	45	55	1.313	-1~6	20	10	52.5	40
2	50	61	1.476	-1~5	15	9	73.8	50
3	75	90	2.992	-1~4	13	8	119.7	40
4	100	116	4.178	-1~3	10	6	125.3	30

PANDAVIEW

EST.2005

VACUPRESS RUBBER HOSE FOR FOOD

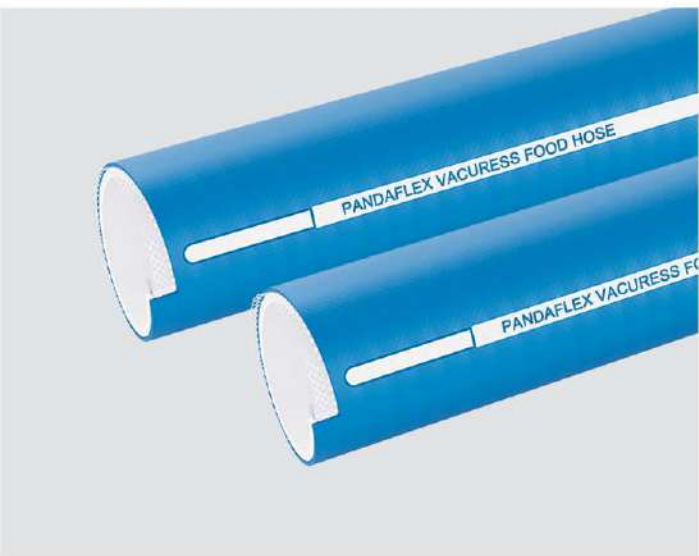

Material: RUBBER EPDM
Usage: For conveyance of liquid & powderFoods and beverages.
Features: Multilayer rubber hose with embedded galvanised steel spiral with polyester yarn reinforcement, for suction and delivery of liquid food and food powder. Celsius -5C to 65C.Conforms to FDA 21 CFR 177.2600

Usage icon:



材质: 三元乙丙橡胶
用途: 各类液体和粉末状食品，酒水饮料。
产品特征: 多层橡胶软管，内嵌镀锌钢螺旋，聚酯纱线增强，用于液体食品 and 食品粉末的吸入和输送。摄氏 -5C 至 65C。符合 FDA 21 CFR 177.2600标准。
应用范围: 食品级各类液体，空气，饮用水，饮料，啤酒，饮料，粉末食品等。



SPECIFICATION:

Size	Metric Meas.(MM)		Weight/M	Vacuum 23°	W.P/B.P 23°		Weight/Roll	M/Roll
	I.D.	O.D			BAR	BAR		
Inch	I.D.	O.D	Kgs	m/H ₂ O	BAR	BAR	Kgs	Meter
3/4	19	28	0.38	9	16	48	22.80	60
3/4	22	31.5	0.45	9	16	48	27.00	60
1	25	35.5	0.58	9	16	48	34.80	60
1-1/4	30	40.5	0.65	9	16	48	39.00	60
1-1/4	32	42.5	0.73	9	13	40	43.80	60
1-1/2	35	47	0.9	9	13	40	54.00	60
1-1/2	38	50	0.92	9	13	40	27.60	30
1-1/2	40	52	0.97	9	10	30	29.10	30
1-3/4	45	57	1.1	9	9	27	33.00	30
1-3/4	50	62.5	1.28	9	9	27	38.40	30
2-1/2	60	73	1.55	9	8	24	46.50	30
2-1/2	63	76	1.6	9	8	24	48.00	30
3	76	91	2.35	9	8	24	70.50	30
3-1/4	80	95.5	2.4	9	8	24	72.00	30
3-1/2	90	106	2.75	9	8	23	82.50	30
4	102	118.5	3.1	9	8	23	93.00	30

PANDAVIEW

EST.2005

VACUPRESS RUBBER HOSE FOR CHEMICAL



Material: RUBBER
Usage: Designed to handle a wide range of chemicals,solvents and corrosive liquids in both pressure and suction using.
Features: Cross-pinked polyethylene(XLPE) against white tube,reinforced by multi layers high tensile nylon cord with helix wire, cover green/black/red/blue/yellow weather & ozone resistant EPDM synthetic rubber,Celsius -40C to 100C.
Usage icon:



材质：三元乙丙橡胶
用途：各类液体和粉末状指定化学品。
产品特点：多层橡胶软管，内嵌镀锌钢螺旋，聚酯纱线增强，用于液体和粉末的吸入和输送。摄氏-40C至100C。
应用范围：重型机械，石油开采，矿山机械，石油工业，粉末和液体状化学品。

SPECIFICATION:

Size		Metric Meas.(MM)		Weight/M	Vacuum 23°	W.P/B.P 23°		Weight/Roll	M/Roll
Inch		I.D.	O.D	Kgs	m/H ₂ O	BAR	BAR	Kgs	Meter
3/4		19	30.4	0.67	9	16	48	40.2	60
1		25	36.4	0.84	9	16	48	50.4	60
1-1/4		30	42.8	1.1	9	16	48	66	60
1-1/4		32	44.8	1.2	9	13	40	72	60
1-1/2		35	48.4	1.35	9	13	40	81	60
1-1/2		38	51.4	1.5	9	13	40	45	30
1-1/2		40	53.4	1.6	9	10	30	48	30
1-3/4		45	59.4	1.75	9	9	27	52.5	30
1-3/4		50	63.4	1.93	9	9	27	57.9	30
2-1/2		60	75	2.2	9	8	24	66	30
2-1/2		63	78.4	2.55	9	8	24	76.5	30
3		76	91	3.08	9	8	24	92.4	30
3-1/4		80	96	3.4	9	8	24	102	30
3-1/2		90	118	4.5	9	8	23	135	30
4		102	121	5.0	9	8	23	150	30


PANDAVIEW

EST.2005

EPDM FOAM SHEET



Material: EPDM RUBBER
Usage: Mechanical buffers, industrial seals, oil refineries, automobiles, ships, industrial equipment, chemical plants.
Features: 30% EPDM content at least, dencity as 0.6G/cm3, anti-uv,will not become hard. No smell and non-toxic. Application under Celsius -40C to 120C.

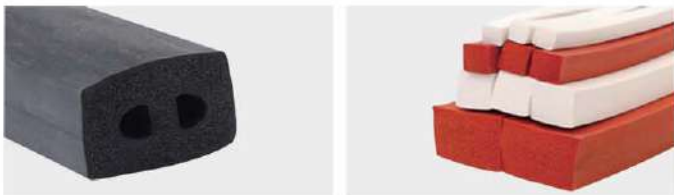

SIZES	LENGTH	Meter weight	Rolls weight	SIZES	LENGTH	Meter weight	Rolls weight	SIZES	LENGTH	Meter weight	Rolls weight
MM	M	KGS	KGS	MM	M	KGS	KGS	MM	M	KGS	KGS
10MMX5MM	50	0.03	1.5	30MMX15MM	50	0.27	13.5	40MMX30MM	50	0.72	36
10MMX10MM	50	0.06	3	30MMX20MM	50	0.36	18	40MMX35MM	50	0.84	42
15MMX5MM	50	0.045	2.25	30MMX30MM	50	0.54	27	40MMX40MM	25	0.96	24
15MMX10MM	50	0.09	4.5	35MMX5MM	50	0.105	5.25	50MMX5MM	50	0.15	7.5
15MMX15MM	50	0.135	6.75	35MMX10MM	50	0.21	10.5	50MMX10MM	50	0.3	15
20MMX5MM	50	0.06	3	35MMX15MM	50	0.315	15.75	50MMX15MM	50	0.45	22.5
20MMX10MM	50	0.12	6	35MMX20MM	50	0.42	21	50MMX20MM	50	0.6	30
20MMX15MM	50	0.18	9	35MMX25MM	50	0.525	26.25	50MMX30MM	50	0.9	45
20MMX20MM	50	0.24	12	35MMX30MM	50	0.63	31.5	50MMX40MM	25	1.2	30
25MMX5MM	50	0.075	3.75	35MMX35MM	50	0.735	36.75	60MMX5MM	50	0.18	9
25MMX10MM	50	0.15	7.5	40MMX10MM	50	0.24	12	60MMX10MM	50	0.36	18
25MMX15MM	50	0.225	11.25	40MMX20MM	50	0.48	24	60MMX20MM	50	0.72	36
25MMX20MM	50	0.3	15	40MMX30MM	50	0.72	36	60MMX30MM	25	1.08	27
25MMX25MM	50	0.375	18.75	40MMX40MM	25	1.44	36	60MMX40MM	25	1.44	36
30MMX5MM	50	0.09	4.5	40MMX50MM	25	1.5	37.5	60MMX50MM	25	1.5	37.5
30MMX10MM	50	0.18	9	40MMX60MM	25	2.1	52.5	60MMX60MM	25	2.1	52.5

PANDAVIEW

EST.2005

NBR CORD



Material: NBR RUBBER
Usage: Mechanical buffers, industrial seals, oil refineries, automobiles, ships, industrial equipment, chemical plants.
Features: 30% EPDM content at least, dencity as 1.4G/cm3, anti-uv, unti-gasoline and Diesel oil. It will not become hard. No smell and non-toxic. Application under Celsius -40C to 120C.



SIZES	LENGTH	Meter weight	Rolls weight	SIZES	LENGTH	Meter weight	Rolls weight
	M	KGS	KGS		M	KGS	KGS
2MM	100	0.004	0.44	2MM	100	0.004	0.44
3MM	100	0.01	0.99	3MM	100	0.01	0.99
4MM	100	0.018	1.76	4MM	100	0.018	1.76
5MM	100	0.027	2.75	5MM	100	0.027	2.75
6MM	100	0.04	3.96	6MM	100	0.04	3.96
7MM	100	0.054	5.39	7MM	100	0.054	5.39
8MM	100	0.07	7.03	8MM	100	0.07	7.03



PVC TRANSPARENT SHEET

Name	PVC Sheet
Color	Clear or you can choose green,blue,red,white,black,etc.
Thickness	0.5mm~10mm or you can tell me what you need.
Width	500-1500mm or Customize.
Length	250/300/350/450/1000/1200/1500/2000 cm or Customize.
Feature	Excellent Transparency, process ability is good, Non-toxic, waterproof, eco-friend, easy to clean.
Application	Used in furniture packing, table cover, duct proof, water proof,industry using.



PVC CURTAIN

Name	PVC curtain
Color	Transparent
Thickness	1mm-12mm or or Customize.
Width	500-1500mm or Customize.
Length	100/150/200/250/300/350/450/500/1000/1200/1500/2000 cm
Feature	Excellent Transparency, process ability is good, Non-toxic, waterproof, eco-friend, easy to clean.
Certification	EN71-3 / REACH / NON-6P / RoHS




SILICON SOFT SHEET

Name	High Elastic Transparent Silicone Sheet
Color	transparent, translucent, red, and any pantone color
Density	1.25+/-0.05 g/cm3
Hardness	60 +/-5 shore A
Tensile Strength	8Mpa
Elongation	400%
Feature	Smooth both sides , Heat/water resistant, good electrical insulation properties
Size available	Width: 0.5m, 1.0m, 1.2m, 1.5m or customized Thickness: 0.3~30mm Length: 5~50m/roll or customized



PU SHEET


Name	PU Sheet
Color	Clear or you can choose yellow,blue,red,white,black,etc.
Density	1.25g/ cm3
Hardness	Shore 85A~90A
Tensile Strength	53Mpa
Elongation	557%
Abrasion	0.019 cm3/1.61km
Bearing capacity	10.5Mpa (compress about 25%)
Feature	high wear and abrasion resistance,resistance to water, oil, grease
Size available	100*100, 100*200, 100*300, 100*400, 200*200, 200*300, 200*400, 300*300, 300*400, 400*400cm or customized Thickness: 10mm, 12mm, 16mm, 20mm, etc.

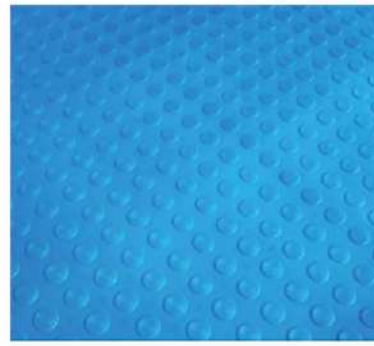

NBR STUD SHEET(BLUE)

Available Blue,black, Grey, green,red,brown color

Name	NBR stud Sheet(blue)
Tensile Strength	500psi / 3Mpa
Hardness	70+-5 Shore A
Color	Available blue, black, green, grey , brown and red color
Size available	Width:100,120,140,150cm or customized Length:100 cm or any length
Thickness	Thickness: 3mm ,4.5mm or or customized
Elongation	200%
Density	1.45g/cm³
Features	Excellent aging resistant, ozone resistant. Good resistance to acid & alkali, steam, abrasion and heat, anti-shock and oil-resistant and Waterproof. Cut edges and rough back surface.
Application	gym/hotel/public area

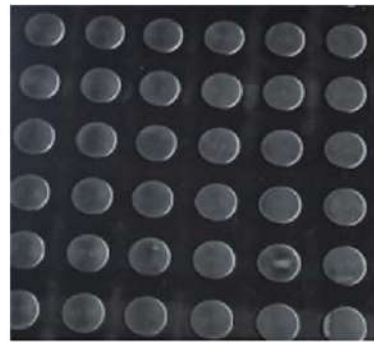

NBR STUD SHEET(BLACK)

Available Blue,black, Grey, green,red,brown color

Name	NBR stud Sheet(black)
Tensile Strength	500psi / 3Mpa
Hardness	70+-5 Shore A
Color	Available blue, black, green, grey , brown and red color
Size available	Width:100,120,140,150cm or customized Length:100 cm or any length Thickness: 3mm ,4.5mm or or customized
Material available	NR/SBR/NBR/EPDM /NEOPRENE
Elongation	200%
Density	1.45g/cm³
Features	Excellent aging resistant, ozone resistant. Good resistance to acid & alkali, steam, abrasion and heat, anti-shock and oil-resistant and Waterproof. Cut edges and rough back surface.
Application	gym/hotel/public area



NBR STRIP RUBBER MAT

Name	Black NBR Strip rubber mat
Tensile Strength	650psi / 4Mpa
Hardness	70+-5 Shore A
Color	Blue,black, Grey, green,red,brown color
Size available	Width:150cm or customized Length:150 cm or any length Thickness: 3mm or customized
Material available	NR/SBR/NBR/EPDM /NEOPRENE
Elongation	250%
Density	1.45g/cm³
Features	Excellent aging resistant, ozone resistant. Good resistance to acid & alkali, steam, abrasion and heat, anti-shock and oil-resistant and Waterproof. Cut edges and rough back surface w/weaving cloth texture
Application	gym/hotel/public area



PVC FLOORING SHEET

Name	Indoor PVC Flooring sheet
Hardness	70+-5 Shore A
Color	Green,blue,red,Grey or customized color Width:140,180cm or customized Length:150 cm or any length
Size available	Thickness: 3.5mm-8mm
Material	100% Virgin PVC material
Density	1.45g/cm³
Features	water-proof,fireproof,good mobility,antibacterial and anti-slip,pvc foamed back
Application	Hotel, Villa, Apartment, Office Building, Hospital, School, Mall,Badminton, table tennis hall
Certification	CE, BWF, ISO14000



CR RUBBER SHEET
Available CR/NR/SBR/NBR/EPDM/NEOPRENE

Name	Black CR Rubber Sheet
Tensile Strength	650psi / 4Mpa
Hardness	65+-5 Shore A
Thickness	1mm ,2mm,3mm,5mm,8mm,100mm,30mm or customized (max.50mm)
Width	Width:100,120,130,140,150cm or customized
Length	100cm, 140cm or any length
Elongation	200%
Density	1.4g/cm³
Features	Excellent aging resistant, ozone resistant. Good resistance to acid & alkali, steam, abrasion and heat, anti-shock and oil-resistant and Waterproof. Cut edges and rough back surface.
Material available	Available NBR,SBR,EPDM material sheet



NATURE RUBBER SHEET

Name	Nature Rubber Sheet
Tensile Strength	20Mpa
Hardness	50+-5 Shore A
Thickness	1mm ,2mm,3mm,5mm,8mm,100mm,120mm or customized (max.120mm)
Width	Width:100mm,140mm or customized
Length	50cm, 100cm or any length
Elongation	500%
Density	1.25g/cm³
Features	Excellent resilience, tensile, elongation and abrasion resistance,100% NR material,Working temperature:-35--+100 °C
Application	Available for gaskets, seals, o-rings, washer,Apply to the pave the floor or put on the workbench



NBR SHEET FOOD GRADE

Name	White NBR Rubber Sheet Food grade
Tensile Strength	650psi / 3.5Mpa
Hardness	70+-5 Shore A
Thickness	1mm ,2mm,3mm,5mm,8mm,100mm,30mm or customized (max.50mm)
Width	Width:100,120,130,140,150cm or customized
Length	100cm, 140cm or any length
Elongation	200%
Density	1.4g/cm³
Features	Excellent aging resistant, ozone resistant. Good resistance to acid & alkali, steam, abrasion and heat, anti-shock and oil-resistant and Waterproof. Cut edges and rough back surface.
Material available	CR/NR/SBR/NBR/EPDM /NEOPRENE



SILICON RUBBER FOAM SHEET

Name	Silicon rubber foam sheet
Tensile Strength	5Mpa-7Mpa
Hardness	20+5 Shore A
Thickness	1-30mm or customized
Width	0.5m, 1.0m, 1.2m, 1.5m or customized
Length	5-50m or customized
Temperature	-40~250 °C
Density	0.7-1.1g/cm³
Material available	SILICON/NBR/EPDM
Color available	Red, gray, black, and other pantone color

PANDAVIEW EQUIPMENT DIVISION

- PVC clear hose producing line
- PVC braided reinforced hose producing line
- PVC steel wire hose producing line
- PVC layflat hose producing line
- PVC suction hose producing line
- PVC full braided hose producing line



SPECIFICATION

A. working environment

1. working location:	Indoor
2. humidity:	85% no condensation
3. temperature:	0~40°C

B. usage condition

1. motor drive:	3phase 380V (-10%,+5%) 50HZ
2. Cooling water:	Pressure≥0.4MPa 2m³/h

C. General Information

1. Hose production range:	6-50mm(6,8,10,12,16,19,25,32,50)
2. Material:	PVC soft granule, yarn
3. Total weight:	~6000kg
4. Whole line length:	~15 meters
5. Hose max output:	50-80kg/h, according to the hose size
6. Installation power:	~78kw
7. Power consumption:	~60kw

D. Summary

1. SJ65X30 single screw extruder:	2sets
2. Control cabinet:	2sets
3. hose extrusion head:	2sets
4. Hose spray cooling water tank(2.4m):	2sets
5. Fiber Knitting Crochet machine:	3set
6. Oven:	1set
7. Hose haul-off machine:	2sets
8. Semi-automatic winder:	1set
9. Hose sealer:	1set
10. SJ25 marking line extruder:	3sets
11. drying hopper:	2 sets

E. Technical data

I Extruder name SJ65X30

1 Extruder	
1.1 Type:	single screw extruder
1.2 Central height:	1000mm
1.3 Max extrusion capacity:	60-70kg/h

2 Screw

2.1 Diameter:	65mm
---------------	------

2.2 L/D:	30
2.3 Material of screw:	38CrMoAlA
2.4 Surface treatment:	Nitriding processed
2.5 Nitriding thickness:	0.50-0.70mm

3 Barrel

3.1 Material of barrel:	38CrMoAlA
3.2 Surface treatment:	Nitriding processed
3.3 Nitriding thickness:	0.50-0.70mm
3.4 Heating zones:	3
3.5 Heating method:	Cast Aluminum heater
3.6 Heating power:	9kw
3.7 Cooling mode:	air fans
3.8 Cooling power:	0.20kwX3

4 Speed reducing box

4.1 Tank material:	HT200
4.2 Gear type:	Helical gears
4.3 Gear material:	20CrMnTi, carburized and quenching
4.4 Lubricating system:	Pressure system

5 Driving motor

5.1 Type of motor:	AC motor
5.2 Motor power:	18.5kw
5.4 Speed control:	Frequency conversion
5.5 power source:	3p*380V*50HZ

6 Automatic feeding and stainless steel hopper device

6.1 Type:	Automatic vacuum feeding
6.2 Max feeding capacity:	100kg/h/set
6.3 Stainless steel hopper volume:	50L

II Electricity control system

1. Temperature control:	Toky (Japan)
2. Inverter:	ABB
3. Electricity parts:	Schneider

III Hose extrusion head

1. Quantity:	5 sets
2. Die material:	45# steel, forged, chrome-plated surface
3. mould quantity:	8sets

4. Mould size:	6,8,10,12,16,19,25,32,38,50mm
5. heating power:	1.5kw

IV Spray cooling water tank

1. Tank length:	2400mm
2. Material of tank:	Stainless Steel

V Fiber Knitting Crochet machine

1. Qty of Weft Yarn:	5 Bobbins 10 needles for 6-15mm, 6 bobbins 12needles for 16-25mm 6 bobbins 24needles for 32mm,38mm , 50mm made in Germany dia.300mm
2. Bobbin inner size:	
3. Loading yarn weight:	10kgs(12kg is the max)
4. Yarn transmission type:	synchronous belt drive
5. Motor power:	3kw
6. Safety device:	Mesh Cover
7. Speed:	2-5m/min

VI Oven

1. Drying effective length:	1set
2. Power of the dryer:	Two sets

VII Soft hose haul-off machine

Haul-off power:	1set
-----------------	------

VIII Semi-automatic winder

Winding roller supply	
-----------------------	--

PANDAVIEW
EST.2005

PVC STEEL WIRE HOSE PRODUCING LINE



SPECIFICATION

■ EXTRUDER

Screw dimension: diameter 7mm,length/diameter 30:1
Screw parameter:
material 38CrMoAlA,Nitrogen permeate 0.6-0.7mm
hardness HV940-1050,Roughness<0.8um.
Screw rate: 0-70 cycles/minute
Main motor: 15KW
Main motor controller: ABB transducer
Heating segment and power: 43segment total 7.5KW
Heating method: heat by ceramics
Cooling method:
3-plot air cooling, cooling motor power 180w
Gear-box reducer: extruder exclusive hard tooth surface
temperature control table: omron
Center height: 1000mm
Appliances:
Delixi air switch, Schneider breaker, ac contactor



■ FLUME

Adjust:
forward-backward and upward-downward adjust
Available length: 2.4M
Cooling method: watering cooling
TRACTION MACHINE: 1
Covering belt: 1800X100X2
Available length: 800MM
Range of speed: 0-6m/min
WEAVE THREAD MACHINE: 1
Main motor power: 3KW
Donkey engine power: 0.75KW
Motor controller: ABB transducer
Safety setting: shield



■ MOLD


Size: 4size with the product line
Material: 45# chromate treatment

AUTOMATIC FEEDING MACHINE: 1 SET
PACKING SHELF: 1 SET



PANDAVIEW
EST.2005

PVC LAYFLAT HOSE PRODUCING LINE

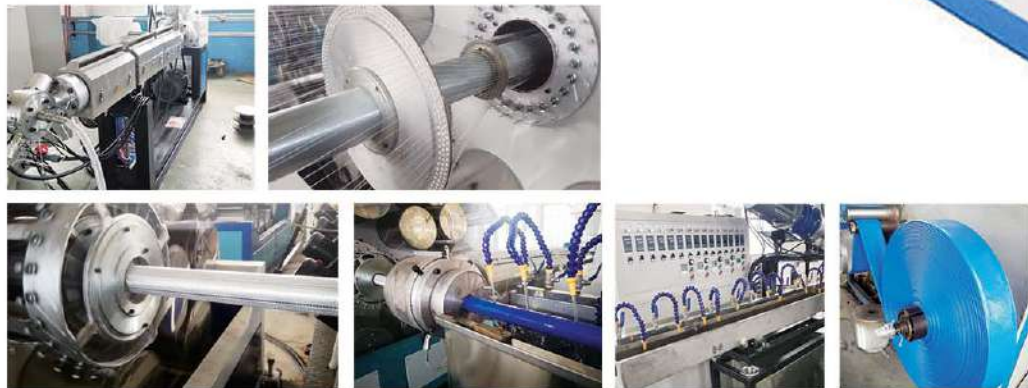

SPECIFICATION

The PVC Special High-Strength Layflat Hose Production line is a new self-developed production by digesting and absorbing the foreign advanced technology manufacturing once-shaped hoses by the special techniques of plasticizing the PVC materials squeezed through extruder, which uses polyester fiber as reinforcing material. The hoses produced by the line have the characteristics of good flexibility, high pressure resistance, corrosion resistance, aging resistance, light weight, no limitation in length, etc.

Mould	extruder (mm)	L/D	matrail	motor (kw)	(kw)	high line (mm)	hose diameter (mm)
SJ-65	65	30	38CrMnAl	15	28	1100	25-75
SJ-90	90	30	38CrMnAl	37	52	1100	75-132
SJ-120	120	30	38CrMnAl	55	75	1100	102-200